

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Attorney Docket No. KANG113878

TRANSMITTAL LETTER

Seattle, Washington 98101

August 6, 1999

TO THE ASSISTANT COMMISSIONER FOR PATENTS:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) by Express Mail is the complete patent application of R. David L. Campbell.

Title: ON-LINE DATABASE UPDATING NETWORK SYSTEM AND METHOD

X 1. This application is a continuation of prior Application Serial No. 08/969,134, filed November 12, 1997, which in turn is a continuation of prior Application Serial No. 08/452,596, filed May 25, 1995, now issued as U.S. Patent No. 5,694,596, priority from the filing date of which is hereby claimed under 35 U.S.C. § 120.

X 2. Please amend the specification of this applicaiton by inserting the folloing after the title:

--Cross-Reference to Related Applications

This application is a continuation of prior Application Serial No. 08/969,134, filed November 12, 1997, which in turn is a continuation of prior Application Serial No. 08/452,596, filed May 25, 1995, now issued as U.S. Patent No. 5,694,596, priority from the filing date of which is hereby claimed under 35 U.S.C. § 120.--

X 3. An application consisting of 62 pages of specification and claims and 14 sheets of formal drawings is attached.

X 3. A copy of the Declaration and Power of Attorney filed in the above noted prior application is attached. [Note: This application is a continuation or divisional, no new matter has been added to this application, and no new inventors have been named.]

X i. The entire disclosure of the prior application, from which a copy of the declaration is supplied, is considered as being part of the disclosure of this application and is hereby incorporated by reference herein.

LAW OFFICES OF  
CHRISTENSEN O'CONNOR JOHNSON & KINDNESS<sup>PLLC</sup>  
1420 Fifth Avenue, Suite 2800  
Seattle, Washington 98101  
(206) 682-8100

- X 4. The prior application was assigned to Kangaroo, Inc., and a change of name document changing the name to Punch Networks Corporation was recorded at reel 9490, frame 0344.
- X 5. A filing date in accordance with 37 C.F.R. § 1.10 is requested. The Express Mail Certificate appears below.

COMPUTATION OF FEE

	Number Filed		Number Extra		Rate		Basic Rate \$380.00
Total Claims	16 - 20	=	0	x	\$9	=	\$0.00
Independent Claims	5 - 3	=	2	x	\$39	=	\$78.00
Multiple Dependent Claims	0		---		\$130	=	\$0.00
TOTAL							\$458.00

- X 6. Our check No. 107990 in the amount of \$458.00 to cover the total fee as computed above is enclosed.
- x 7. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16, 1.17 and 1.18 which may be required during the entire pendency of the application, or credit any overpayment, to Deposit Account No. 03-1740. This authorization also hereby includes a request for any extensions of time of the appropriate length required upon the filing of any reply during the entire prosecution of this application. A copy of this sheet is enclosed.

Please address all further correspondence to:

CHRISTENSEN O'CONNOR JOHNSON & KINDNESS<sup>PLLC</sup>  
1420 Fifth Avenue, Suite 2800  
Seattle, WA 98101

Respectfully submitted,

CHRISTENSEN O'CONNOR  
JOHNSON & KINDNESS<sup>PLLC</sup>

*Mary L. Culić*

Mary L. Culić

Registration No. 40,574

Direct Dial (206) 695-1714

**EXPRESS MAIL CERTIFICATE**

"Express Mail" mailing label number EM523799137US

Date of Deposit August 6, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express

LAW OFFICES OF  
CHRISTENSEN O'CONNOR JOHNSON & KINDNESS<sup>PLLC</sup>  
1420 Fifth Avenue, Suite 2800  
Seattle, Washington 98101  
(206) 682-8100

Erin Belliveau  
(Typed or printed name of person mailing paper or fee)

Erin Belliveau  
(Signature of person mailing paper or fee)

[illegible]

UNITED STATES PATENT APPLICATION  
of  
R. DAVID L. CAMPBELL  
for  
ON-LINE DATABASE UPDATING NETWORK  
SYSTEM AND METHOD

## BACKGROUND OF THE INVENTION

This invention relates to on-line database networking and more particularly to the application of an on-line database updating network to responsible materials selection.

## DESCRIPTION OF THE RELEVANT ART

5           Heightened public and private awareness of environmental and ecological concerns has created a need for specialized information management. Problems of a tangible nature, such as landfill shortages, and problems of a less comprehensible nature, such as ozone depletion, have brought waste reduction and recycling to the front page of many fields of design, engineering, planning, and legislation.

10           Professional practices in the fields of design, engineering, planning, and legislation require the specification of materials to be used during production and/or construction of an object or environment. Informed materials selection, if done properly, can greatly reduce the stress put on ecosystems and societies by specifying "sustainable" materials and processes. Additionally, through the use of resources that enable responsible material selection at the outset of a project, the potential need for costly design changes later in the project lifecycle may be minimized.

20           The goal of providing environmentally responsible and sustainable materials and processes is a difficult one due to the diffused nature of the varied sources of information.

25           Object and image creators require a designed, comprehensive

research tool or reference resource to allow them to make inherently responsible and necessary choices quickly. Currently, time is the primary inhibitor of such research. Usually, by the time the appropriate information is located, the project is already done and "out the door". To provide the information necessary to the making of informed materials decisions, a resource is needed that will unify and organize the necessary information in one place.

In addition to the need for information management to facilitate research in the areas of ecologically responsible materials, materials processing, and materials recycling, there is also a need to make on-line communications and programs act in a more intuitive, less confusing, and less costly manner.

#### OBJECTS OF THE INVENTION

A general object of the invention is an on-line database updating network using object-oriented programming to support selective program updating by module blocks.

Another object of the invention is environmentally responsible materials selection through on-line networking of databases.

An additional object of the invention is a method of selectively updating subparts of user databases using object-oriented programming to build a program out of discrete "blocks" of code, where each block may be contained, accessed, modified or replaced by other blocks.

A further object of the invention is a desk reference

educational guide to materials for architects, engineers, and industrial and graphics designers.

#### SUMMARY OF THE INVENTION

5 According to the present invention, as embodied and broadly described herein, an on-line database updating network and method is provided.

10 The communications network of the present invention comprises a communications channel, a user terminal, and a host terminal. The user terminal may include a user memory, user-input means, user display, a user processor, and a user-connecting means. The input means and the connecting means may be embodied as a keyboard and a user data port, respectively.

15 The user data port is connected to the communications channel. The user processor is connected to the user data port. The user memory and the keyboard are connected to the user processor. The user display is connected to the keyboard and to the user processor.

20 The user data port interfaces between the user terminal and the communications channel. The user memory stores a plurality of user modules in a modules folder; each user module includes a plurality of user module blocks of information. The keyboard inputs user identification data and other data to the user processor and/or the user memory. The user display displays messages and screens to the user. The user processor processes user input data, locates the data port, and accesses the  
25 communications channel.

The host terminal includes host-communications means, host-connecting means such as a host data port, a host memory, and a host processor.

5 The host data port is connected to the communications channel. The host processor is connected to the host data port. The host memory is connected to the host processor.

10 The host data port interfaces between the host terminal and the communications channel. The host processor receives user information data and other data sent from the user terminal to the host terminal using the communications channel. The host processor also sends host data from the host terminal to the user terminal using the communications channel. The host memory stores a plurality of host modules; each host module includes a plurality of host module blocks of information.

15 In use of a representative embodiment of the present invention, a user inputs user identification data into the user terminal using the keyboard. In response to the user identification data, the user processor scans the user memory for user modules in the user modules folder. In response to locating a user module having a user origin date, the user processor scans the user data port for a host terminal. In response to finding a host terminal, the user processor accesses the communications channel to connect with the host terminal. The user terminal sends user identification data and data on the user module to the host terminal.

20

25

The host terminal, operatively coupled to the user terminal through the communications channel, receives the user



identification data from the user terminal. In response to the user identification and user module data, the host processor sends, over the communications channel, a host origin date for a host module corresponding to the user module. Responsive to receiving the host origin date for the host module, the user processor compares the host origin date for the host module to the user origin date for the corresponding user module. In response to determining that the host origin date is more recent than the user origin date, the user processor identifies those host module blocks of information, within the host module, having origin dates more recent than corresponding user module blocks of information, within the user module, as updated blocks. The user processor then downloads to the user memory the updated blocks, and replaces the older user module blocks of information with the downloaded updated blocks.

The present invention also may be embodied as a method for updating databases using a network including a user terminal, a host terminal, and a communications channel.

The user terminal includes a display, a data port, and a user terminal memory for storing user modules comprising user module blocks of information in a modules folder. The host terminal includes a host terminal memory for storing host modules comprising host module blocks of information.

The method of the present invention comprises the steps of activating the user terminal, scanning the modules folder in the user terminal memory for stored user modules, and locating a stored user module having a user origin date. The method

further comprises the steps of locating a host terminal,  
scanning the host terminal memory for stored host modules, and  
locating a stored host module corresponding to the stored user  
module and having a host origin date. The method then comprises  
5 the steps of retrieving from the user terminal memory the user  
origin date, and comparing by the user terminal the user origin  
date and the host origin date. In response to the host origin  
date being more recent than the user origin date, the user  
terminal identifies those host module blocks of information  
10 having origin dates more recent than corresponding user module  
blocks of information as updated blocks, and downloads the  
updated blocks into the user terminal memory. The stored user  
module is then updated with the downloaded updated blocks and  
the host origin date.

15 Additional objects and advantages of the invention are set  
forth in part in the description which follows, and in part are  
obvious from the description, or may be learned by practice of  
the invention. The objects and advantages of the invention also  
may be realized and attained by means of the instrumentalities  
20 and combinations particularly pointed out in the appended  
claims.

#### BRIEF DESCRIPTION OF THE DRAWINGS

25 The accompanying drawings, which are incorporated in and  
constitute a part of the specification, illustrate preferred  
embodiments of the invention, and together with the description  
serve to explain the principles of the invention. The  
terminology used in the figures is defined and explained in the

Detailed Description of the Perferred Embodiments.

FIG. 1 illustrates a representative network structure according to the present invention;

FIG. 2 depicts a flow chart of the start-up procedure and local access connection using the method of the present invention;

FIG. 3 depicts a flow chart of the remote access procedure using the method of the present invention;

FIG. 4 depicts a flow chart of the registration procedure for access to the network of the present invention;

FIG. 5 depicts a flow chart of the update procedure between host and user terminals using the method of the present invention;

FIG. 6 depicts a flow chart of the update procedure between alternate host and user terminals using the method of the present invention;

FIG. 7 depicts a representative upper-level screen display with pop-up menus;

FIG. 8 depicts representative choices within a "Materials" pop-up menu;

FIG. 9 depicts representative choices within a "Properties" pop-up menu;

FIG. 10 depicts representative choices within a "Concerns" pop-up menu; and

FIG. 11 depicts representative choices within a "Resources" pop-up menu.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

According to the present invention, as embodied and broadly described herein, an on-line database updating network and method is provided.

5 This document describes a system and method for a self updating database network. However, it is possible and intended that the technology described herein may also be applied to non-database systems and software such as operating systems, operating system implementations, operating system add-ons,  
10 i.e., "extensions" for MACINTOSH<sup>TM</sup>, or "Modules" for WINDOWS<sup>TM</sup>, software applications, software implementations and add-ons, application documents or files, and related applications.

As used herein, the term "folder", which is platform-specific to APPLE MACINTOSH<sup>TM</sup> computers, is used  
15 representatively and is meant to include any equivalent cross-platform counterparts such as directory, sub-directory, etc. Similarly, the term "desktop" is used representatively for purposes of illustration and is intended to include equivalent counterparts in different platforms.

20 As used in this document, the word "materials" may be defined as, but is not limited to, materials documentation including raw ingredients, processing, manufacturing, recycling, resources, chemistry, de-manufacturing, industry associations, alternatives, etc. Also, the word may be replaced with other  
25 fields of study or research such as psychology, medicine, or chemistry and may include associated subcategories/specialties respectively within the relevant field.

The present invention comprises a communications network having a communications channel, a user terminal, and a host terminal. The user terminal includes user-connecting means, user-memory means, user-input means, user-display means and user-processor means. The user terminal may, but is not required to, also include user-communications means.

The user-connecting means is connected between the communications channel and the user-processor means. The user-memory means is connected to the user-processor means. The user-input means is connected to the user-processor means. The user-display means is connected to the user-input means and to the user-processor means. If user-communications means were used, the user-communications means may be connected between the communications channel and the user-connecting means. Alternatively, the user-communications means may be integral to the user-processor means as is well known in the art.

The user-connecting means connects the user terminal to the communications channel. The user-memory means stores a plurality of user modules in a modules folder; each user module includes a plurality of user module blocks of information. The user-input means inputs user identification data and other data to the user terminal. The user-processor means processes user input data, scanning the user-connecting means, and accessing the communications channel. The user-display means is for displaying messages and screens to the user. The user-communications means, if included, is for sending user information and data from the user terminal to a remotely

located host terminal over the communications channel.

5 The user-display means may be embodied as a display. The user-connecting means may be embodied as a data port, a serial port, or equivalent. The user-memory means may be embodied as a memory. The user-input means may be embodied as a keyboard, a voice-activated input device, or equivalent input structure. The user-communications means may be embodied as a modem. The user-processor means may minimally be embodied as an INTEL PENTIUM<sup>TM</sup> chip, INTEL<sup>TM</sup> 80486 chip, a MOTOROLA<sup>TM</sup> 68000 chip, or 10 any equivalent processor. An upgraded processor may be used if higher level operations are desired or if the updating procedure is to performed as a background operation. More specifically, although reference is made to specific processors within this document, these references are for example only and cannot 15 reflect the dynamic nature of the state-of-the-art. Instead, these references are only provided to convey that the minimal processor embodiment to allow the updating method to occur transparently "in the background", i.e., without the user's knowledge or input, would be any processor or system of processors which allows for "preemptive multi-tasking" as 20 opposed to co-operative multi-tasking which requires top-level software/applications to give permission to any secondary or background software to allow such secondary or background software to command processor time.

25 The host terminal includes host-connecting means, host memory means, and host-processor means. Optionally, the host terminal also may include host-communications means, host input

means, and host-display means.

5 The host-connecting means is connected between the communications channel and the host-processor means. The host memory means is connected to the host-processor means. If included, the host-communications means may be connected between the communications channel and the host-connecting means. Alternatively, the host-communications means may be integral to the host-processor means as is well known in the art. The host input means and the host-display means, if included, are connected to the host-processor means and to each other.

10 The host-connecting means is for connecting the host-processor means to the communications channel. The host memory means is for storing a plurality of host modules; each host module includes a plurality of host module blocks of information. The host module blocks of information may include non-updated host-module blocks of information and updated host-module blocks of information. As used in this application, a host module block of information is an "updated" block if it has an origin date more recent than an origin date of a corresponding user module block of information.

15 The host-processor means processes user identification data and other data received from the user terminal, and directs the transmission of host module blocks of information to the user terminal. The host-communications means receives user information data and other data sent from a remotely-located user terminal to the host terminal using the communications channel. The host-communications means also sends host data

from the host terminal to the remotely-located user terminal using the communications channel. The host input means, if included, inputs data to the host terminal. The host-display means, if included, displays messages and screens to a user.

5           The host-connecting means may be embodied as a data port, a serial port, or equivalent. The host memory means may be embodied as a memory. The host-processor means may be minimally embodied as an INTEL PENTIUM™ 80486 chip, INTEL™ chip, a MOTOROLA™ 30386 chip, or any equivalent processor. An upgraded  
10 processor may be used if higher level operations are desired or if the updating procedure is to be performed as a background operation. More specifically, although reference is made to specific processors within this document, these references are for example only and cannot reflect the dynamic nature of the state-of-the-art. Instead, these references are only provided  
15 to convey that the minimal processor embodiment to allow the updating method to occur transparently "in the background", i.e., without the user's knowledge or input, would be any processor or system of processors which allows for "preemptive multi-tasking" as opposed to co-operative multi-tasking which  
20 requires top-level software/applications to give permission to any secondary or background software to allow such secondary or background software to command processor time. The host-communications means may be embodied as a modem. The host input  
25 means, if included, may be embodied as a keyboard, a voice-activated input device, or equivalent. The host-display means, if included, may be embodied as a display.



In use, a user inputs user identification data to the user terminal using a user input device. In response to the user identification data, the user processor scans the user memory for user modules in the modules folder. In response to locating a user module having a user origin date, the user processor scans a data port for a host terminal. In response to finding a host terminal, the user processor accesses the communications channel to connect with the host terminal. The user terminal sends user identification data and data on the user module to the host terminal.

The host terminal, operatively coupled to the user terminal through the communications channel, accepts the user identification data from the user terminal. In response to the user identification and user module data, the host processor sends, over the communications channel, a host origin date for a host module corresponding to the user module. Responsive to receiving the host origin date for the host module, the user processor retrieves the user origin date and compares the user origin date to the host origin date. In response to determining that the host origin date is more recent than the user origin date, the user processor identifies those host module blocks of information, within the host module, having origin dates more recent than corresponding user module blocks of information, within the user module, as updated blocks. The user processor then downloads to the user memory the updated blocks.

Alternatively, in a secondary embodiment, the network may be configured such that, in response to determining that the host

origin date is more recent than the user origin date, the user processor downloads the host module and replaces the user module with the downloaded host module.

5 If the user terminal and the host terminal were remotely located from one another, then the user terminal includes a user modem and the host terminal includes a host modem. After the user terminal has received user identification data and has located a user module in the modules folder, the user processor scans for a user modem. In response to finding a user modem  
10 with appropriate settings, the user processor accesses the communications channel to connect with the remotely-located host terminal. The remotely-located host terminal accepts the dialed connection through the host modem. The user module update procedure then continues in a manner equivalent to the user  
15 module update procedure followed with the local host.

The present invention may further include an alternate host terminal. The alternate host terminal comprises alternate host-connecting means, alternate host memory means, and alternate host-processor means. Optionally, the alternate host terminal  
20 may also include alternate host-communications means, alternate host input means and alternate host-display means.

The alternate host-connecting means is connected between the communications channel and the alternate host-processor means. The alternate host memory means is connected to the  
25 alternate host-processor means. If included, the alternate host-communications means may be connected between the communications channel and the alternate host-connecting means.

Alternatively, the alternate host-communications means may be integral to the alternate host-processor means as is well known in the art. The alternate host input means and the host-display means, if included, are connected to the alternate host-processor means and to each other.

The alternate host-connecting means is for interfacing between the communications channel and the alternate host-processor means. The alternate host memory means is for storing a plurality of alternate host modules; each alternate host module includes a plurality of alternate host module blocks of information. The alternate host module blocks of information may include non-updated alternate host-module blocks of information and updated alternate host-module blocks of information. As used in this application, an alternate host module block of information is an "updated" block if it has an origin date more recent than a corresponding user module block of information.

The alternate host-processor means is for processing user identification data and other data received from the user terminal and for directing the transmission of alternate host module blocks of information to the user terminal. The alternate host-communications means, if included, is for accepting a connection from a remotely-located user terminal and for sending alternate host module blocks of information to the remotely-located user terminal. The alternate host input means, if included, is for inputting data to the alternate host terminal. The alternate host-display means, if included, is for

displaying messages and screens to a user.

The alternate host-connecting means may be embodied as a data port, a serial port, or equivalent. The alternate host memory means may be embodied as a memory. The alternate host-processor means may be embodied as any of the processor chips previously identified in connection with the host processor means and subject to the same caveats regarding the state-of-the-art and preemptive multi-tasking requirements. The alternate host-communications means, if included, may be embodied as a modem. The alternate host input means, if included, may be embodied as a keyboard, a voice-activated input device or equivalent. The alternate host-display means, if included, may be embodied as a display.

In use with the present invention, the alternate host terminal, operatively coupled to the user terminal through the communications channel, accepts user identification data from the user terminal. In response to the user identification data and user module data received from the user terminal, the alternate host processor sends, over the communications channel, an alternate host origin date for an alternate host module corresponding to the user module. The user processor, in response to receiving the alternate host origin date for the alternate host module, retrieves the user origin date and compares the alternate host origin date for the alternate host module to the user origin date of the corresponding user module. In response to determining that the alternate host origin date is more recent than the user origin date, the user processor

identifies those alternate host module blocks of information,  
within the alternate host module, having origin dates more  
recent than corresponding user module blocks of information,  
within the user module, as updated blocks. The user processor  
then downloads to the user memory the updated blocks.

Alternatively, in a secondary embodiment, the network may be  
configured such that, in response to determining that the  
alternate host origin date is more recent than the user origin  
date, the user processor downloads the alternate host module and  
replaces the user module with the downloaded alternate host  
module.

If the user terminal and the alternate host terminal were  
remotely located from one another, then the user terminal  
includes a user modem and the alternate host terminal includes  
an alternate host modem. After the user terminal has received  
user identification data and has located a user module in the  
modules folder, the user processor scans for a user modem. In  
response to finding a user modem with appropriate settings, the  
user processor accesses the communications channel to connect  
with the remotely-located alternate host terminal. The  
remotely-located alternate host terminal accepts the dialed  
connection through the alternate host modem. The user module  
update procedure then continues in a manner equivalent to the  
user module update procedure followed with the local alternate  
host.

The present invention also may be embodied as a method for  
updating databases using a network including a user terminal, a

host terminal, and a communications channel. The network may further include an alternate host terminal.

The user terminal includes a display, an input device, a user data port, and a user terminal memory for storing user modules of grouped information in a modules folder. The host terminal includes a data port and a host terminal memory for storing host modules of grouped information.

The method of the present invention comprises the steps of activating the user terminal using the input device, scanning the modules folder in the user terminal memory for stored user modules, and locating a stored user module having a user origin date. The method further comprises the steps of locating a host terminal and connecting to the host terminal through the user data port, through the communications channel, and to the host data port. The method then includes the steps of scanning the host terminal memory for stored host modules, and locating a stored host module corresponding to the stored user module and having a host origin date. The method then comprises the steps of retrieving from the user terminal memory the user origin date and comparing, by the user terminal, the user origin date and the host origin date. The method then downloads the stored host module into the user terminal memory in response to the host origin date being more recent than the user origin date, and replaces the stored user module with the more recent stored host module and the host origin date.

In response to the host origin date being more recent than the user origin date, the method may further comprise the steps

of scanning, by the user processor, the stored user module for a plurality of user-module-block origin dates, and scanning the stored host module for a plurality of host-module-block origin dates. The plurality of user-module-block origin dates  
5 correspond with a plurality of user module blocks, respectively. Each user module of grouped information may be subdivided into such a plurality of user module blocks, each of which blocks may be updated, deleted, moved, or left unchanged, independently of the remaining plurality of user module blocks. Similarly, the  
10 plurality of the host-module-block origin dates correspond with a plurality of host module blocks, respectively. Each host module of grouped information may be subdivided into such a plurality of host module blocks, each of which blocks may be updated, deleted, moved or left unchanged, independently of the  
15 remaining plurality of host module blocks.

The method further comprises the steps of comparing the plurality of user-module-block origin dates to the corresponding plurality of host-module-block origin dates, respectively, and downloading only those host module blocks within the stored host  
20 module having host-module-block origin dates more recent than user-module-block origin dates of respective user module blocks within the stored user module, as updated blocks. Using these method steps, only host module blocks which have been updated relative to corresponding user module blocks are downloaded over  
25 the communications channel to the user terminal memory as updated blocks. Host module blocks having host-module-block origin dates older than corresponding user-module-block origin

dates are not downloaded.

In addition to downloading updated blocks, the user terminal can also identify new host-module blocks. A "new" host-module block is a host module block having no corresponding user-module block within the plurality of user module blocks. The method of the present invention further comprises the steps of downloading new host-module blocks into the user memory as updated blocks.

The method further comprises the steps of scanning the modules folder in the user terminal memory for additional stored user modules, and locating an  $n^{\text{th}}$  stored user module having an  $n^{\text{th}}$  user origin date. The method further comprises the steps of locating an  $n^{\text{th}}$  host module, corresponding to the  $n^{\text{th}}$  user module, and having an  $n^{\text{th}}$  host origin date. The method then comprises the steps of retrieving from the user terminal memory the  $n^{\text{th}}$  user origin date and comparing, by the user terminal, the  $n^{\text{th}}$  user origin date and the  $n^{\text{th}}$  host origin date. In response to the  $n^{\text{th}}$  host origin date being more recent than the  $n^{\text{th}}$  user origin date, the method then includes the steps of downloading the  $n^{\text{th}}$  host module into the user terminal memory and replacing the  $n^{\text{th}}$  user module with the more recent  $n^{\text{th}}$  host module and  $n^{\text{th}}$  host origin date.

In response to the  $n^{\text{th}}$  host origin being more recent than the  $n^{\text{th}}$  user origin date, the method may further comprise the steps of scanning the  $n^{\text{th}}$  host module for  $n^{\text{th}}$  host module blocks having origin dates more recent than corresponding  $n^{\text{th}}$  user module blocks as updated blocks, and downloading the updated



blocks.

Reference now is made in detail to the present preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings, wherein like reference numerals indicate like elements throughout the several views.

As illustratively shown in FIG. 1, the communications network of the present invention includes, by way of example, user terminals called Joeys 10, 11, 12, host terminals called Parent Kangaroos 13, 15, and alternate host terminals called Alternate Kangaroos 14, 16, 17, 18.

The terminology of "Joeys" and "Kangaroos" is employed to convey the mobile nature of a user engaged in research using the network of the present invention. Kangaroos are mobile creatures and move from one area to another in search of food or other needs. A user terminal, i.e., Joey, is also "mobile" in the sense that the Joey can "travel" through the network in search of research data which can be gathered from any number of different host locations, i.e., Kangaroos.

A Joey is an individual user of the Kangaroo software who does not support other Joeys with information. A Joey can modify its own on-site databases, and can hop to Alternate Kangaroos to gather custom specific database information for the Joey's desktop. A Joey can also forward or upload new or updated information to its Parent Kangaroo's free archives.

Each host terminal, or Parent Kangaroo, has two sections. The first section, here referred to as the "free archives", contains unconfirmed information. The second section, here

referred to as the "library", contains confirmed information. A Parent Kangaroo 13 supports or feeds information and program updates to the Joeys 10, 11, 12 which are connected to it. A Parent Kangaroo owns sample collections and can lend these sample collections to Joeys and to other Kangaroos when a sample request is received. Parent Kangaroos can be located at local libraries, schools, and at regional offices of industrial associations. For each Joey, a Parent Kangaroo is selected according to location; the Kangaroo nearest a particular Joey will become that Joey's Parent Kangaroo upon registration into the network.

Alternate Kangaroos, like Parent Kangaroos, own sample collections, and support and feed information and program updates to Joeys. Each Alternate Kangaroo has two sections. The first section, the "free archives", contains unconfirmed information. The second section, the "library", contains confirmed information. Alternate Kangaroos may be distinguished from Parent Kangaroos, however, in that Alternate Kangaroos contain and maintain specific databases and samples related to their particular specialty. For example, G.E. Plastics would be an Alternate Kangaroo providing specialized information related to plastics. Any person, association, or business considered by its peers to be an authority in a given area of expertise can become an Alternate Kangaroo.

As shown by the graphic depiction in FIG. 1, Alternate Kangaroos have a hybrid status in which they may sometimes act as Joeys and at other times act as Parent Kangaroos. This

hybrid status is reflected in FIG. 1 by the circle within a rectangle configuration denoting each Alternate Kangaroo and arises from the function of the Alternate Kangaroos.

5 An Alternate Kangaroo acts both as a Joey and as a Parent Kangaroo, depending upon user needs. For example, Alternate Kangaroo 14 is a "Joey" to Parent Kangaroo 15. As a "Joey", a user enters user identification data, using a user-input device, into Alternate Kangaroo 14. As with any "Joey", the display of Alternate Kangaroo 14 is used to convey messages and screens to the user. At the same time, Alternate Kangaroo 14 fulfills Parent Kangaroo-type functions as an Alternate Kangaroo to Joey 12. Similarly, Alternate Kangaroo 16 can act as both a pseudo-Parent Kangaroo to Alternate Kangaroos 17, 18, and as a Joey to Alternate Kangaroos 17, 18. Alternate Kangaroo 16 may act as a Joey to Parent Kangaroo 13 and may also act as an Alternate Kangaroo to the Parent Kangaroo 13. Each Joey 10, 11, 12 is connected to a Parent Kangaroo 13. A Joey may also be connected to an Alternate Kangaroo 14. Additional Alternate Kangaroos may also be subscribed to by any given Joey.

20 In use of a network such as that depicted in FIG. 1, a user activates the Joey 12 by inputting user identification data. In response to the user identification data, the Joey 12 scans the modules folder in the Joey's memory for a stored user module. Upon locating, responsive to scanning the modules folder, a first stored user module having a first user origin date, the Joey scans the Joey's data port for the Parent Kangaroo 13. Locating the Parent Kangaroo 13, the Joey connects through the

communications channel 23 to the Parent Kangaroo 13. The Joey then scans the Parent Kangaroo's memory for stored host modules. Upon locating a stored host module corresponding to the first stored user module in the Joey 12 and having a host origin date, the Joey 12 retrieves the first user origin date, and compares the first user origin date to the host origin date. In response to the host origin date being more recent than the first user origin date, the Joey scans the Parent Kangaroo's stored host module for host module blocks having corresponding host-module-block origin dates more recent than user-module-block origin dates of corresponding user module blocks. The Joey then downloads over the communications channel 23 those host module blocks having origin dates more recent than corresponding user module blocks as updated blocks. These downloaded updated blocks are then used to update the stored user module in the Joey 12 by replacing the older blocks. The host module blocks may be downloaded in compressed format in accordance with various compression methodologies well known in the art, and then may be decompressed following successful file transfer, as is also known in the art. The terms "compression" and/or "decompression" as used in this document refer to any method or algorithm used by a program to reduce or expand, respectively, the size in bits, bytes, kilobytes, megabytes, etc. of a file or module of information.

The method then continues with the Joey 12 scanning the alternate modules folder in the Joey's memory for a stored user module. Upon locating a second stored user module having a

second user origin date in the alternate modules folder, the  
Joey 12 scans the Joey's data port for the Alternate Kangaroo  
14. Upon locating the Alternate Kangaroo 14, the Joey connects  
through the communications channel 21 to the Alternate Kangaroo  
14. The Joey then scans the Alternate Kangaroo's memory for a  
stored alternate host module. Upon locating a stored alternate  
host module corresponding to the second stored user module and  
having an alternate host origin date, the Joey retrieves the  
second user origin date for the second stored user module from  
the alternate modules folder. The Joey then compares the second  
user origin date to the alternate host origin date. In response  
to the alternate host origin date being more recent than the  
second user origin date, the Joey identifies those alternate  
host module blocks having alternate-host-module-block origin  
dates more recent than user-module-block origin dates of  
corresponding user module blocks within the second stored user  
module, as updated blocks. The Joey 12 then downloads over the  
communications channel 21 the updated blocks from the Alternate  
Kangaroo 14. The updated blocks are then used to update the  
second stored user module in the Joey's memory by replacing the  
older blocks. The alternate host module blocks, like the host  
module blocks, may be downloaded in compressed format in  
accordance with various compression methodologies well known in  
the art, and may then be decompressed following successful file  
transfer.

As depicted in FIG. 2, upon start-up a Joey looks 101 for  
the serial number of its Kangaroo subscription. If the serial

number is not found 102, the Joey prompts 103 the user for a serial number. If the serial number is not found 104, the Joey alerts 105 the user that the serial number was not found or was in an invalid format. If a serial number is found 104, the Joey looks 106 for an authorization number. If an authorization number is not found 107, the Joey alerts 108 the user with a message asking the user if the user would like to subscribe to the Kangaroo network. If the user chooses to subscribe, the method continues as set forth in FIG. 4. If the user does not wish to subscribe, the start-up procedure ends 109.

Returning to the Joey's search for an authorization number, if an authorization number is found 107, the Joey scans 110 the modules folder in the Joey's memory. If a module is not found 111, the Joey scans 112 the alternate modules folder. If a module is not found 113 in the alternate module folder, the start-up process ends 114. If a module is found in the modules folder 111 or in the alternate modules folder 113, the Joey scans 115 a user terminal port for Kangaroo media. If Kangaroo media is not found 116, the method continues as set forth in FIG. 3. If Kangaroo media is found 116, the Joey begins 117 the update procedure.

In response to the Joey scanning the user terminal port for Kangaroo media 115 and finding 116 Kangaroo media, the method continues as set forth in FIG. 3. The Joey scans 120 the user terminal port for a modem. If a modem is not found 121, the Joey alerts 122 the user that a modem is required to use the Kangaroo network. If there were no modem, then the process for

connecting the Joey to the Kangaroo network ends 123. If a  
modem were found 121, then the Joey scans 124 the modem for  
modem settings. If modem settings were not found 125, then the  
Joey alerts 126 that modem settings must be determined. The  
Joey then opens 127 a modem settings dialog box. In response to  
the modem settings dialog box, the user inputs 128 modem  
settings.

Once modem settings are found 125, the Joey gets 129 an  
area code from the modem settings and scans for a match in the  
host Kangaroo's folder. If a match were not found 130, then the  
Joey directs 131 the user to connect to the Kangaroo network  
using a specified telephone number such as 1-800-ROO-SERV. The  
number, 1-800-ROO-SERV, is used herein as a representative  
number for purposes of example only and may not refer to an  
actual number currently in use. If a telephone connection were  
not confirmed 132, then the Joey retries 133 to connect to 1-800-  
ROO-SERV. If after retrying, a connection were not confirmed  
134, then the Joey alerts 135 the user that the Joey could not  
contact the Kangaroo. The process for connecting to the  
Kangaroo network then ends 136. If at any time after connecting  
to 1-800-ROO-SERV, a connection were confirmed 132, 134, then  
the Joey begins 143 the update procedure.

If when scanning 129 for a match in the host Kangaroo's  
folder, the Joey found 130 a match, the Joey then directs 137  
the modem to dial the local Kangaroo. If a connection were not  
confirmed 138, then the Joey retries 139 to make a connection  
with the local Kangaroo. If a connection were not confirmed

140, then the Joey directs the modem to connect to the Kangaroo network using 1-800-ROO-SERV. If a telephone connection were not confirmed 142, then the Joey retries 133 to make a connection to 1-800-ROO-SERV. If a connection were not confirmed 134, then the Joey alerts 135 the user that the Joey could not contact the Kangaroo. The process for connecting to the Kangaroo network will then end 136. If, however, a connection were confirmed 134, 142, 138, then the Joey begins 143 the update procedure.

FIG. 4 depicts the user registration process. during the start-up procedure the Joey were not successful in finding an authorization number, then the Joey alerts 108 the user and asks if the user would like to subscribe to the Kangaroo network. In response to an indication from the user that the user wishes to subscribe, the Joey scans 150 the user terminal port for a modem. If a modem were not found 151, then the Joey alerts 152 the user that a modem is required to use the network. The process for connecting to the Kangaroo network then ends 153. If a modem were found 151, then the Joey directs 154 the modem to connect to 1-800-ROO-SERV. If a connection is not confirmed 155, the Joey alerts 156 the user that the Joey could not contact the Kangaroo and will retry later. The process for connecting to the Kangaroo network then ends 157.

If a connection were confirmed 155, then the Joey prompts 158 the user for user-identification data. User identification data may include the user's full name, the user's company name, the user's address, the user's phone number, the user's fax number, and the user's e-mail address. The Joey then prompts



159 the user for a credit card number. If the bank did not  
approve 160 the account number provided by the user, then the  
Joey alerts 161 the user that the Joey could not verify the  
account. The user is then instructed to call a specified  
5 telephone number such as 1-800-KAN-GROO. The number, 1-800-KAN-  
GROO, is used herein as a representative number for purposes of  
example and may not refer to an actual number currently in use.  
The process for connecting to the Kangaroo network then ends  
162. If the bank approved 160 the account number provided by  
10 the user, then the Joey downloads 163 the authorization number  
and then installs 164 the authorization number. Once the  
authorization number is installed 164, the method continues as  
set forth in FIG. 2 with the Joey scanning 110 the modules  
folder, finding 111 a module, scanning 115 the user terminal  
15 port for Kangaroo media, finding 116 media, and beginning 117  
the update procedure.

FIGS. 5 and 6 depict flow diagrams of the update procedure.  
Looking to FIG. 5, to begin the update procedure the Joey scans  
170 the modules folder in the Joey's memory. If a module were  
not found 171, then the method continues as set forth in FIG. 6.  
20 If a first module were found 171, then the Joey retrieves 172  
the origin date for the first module. The Joey then compares  
173 the retrieved origin date retrieved to the origin date of a  
corresponding Kangaroo module. If the Kangaroo origin date were  
not more recent 174 than the origin date of the first module,  
25 then the Joey scans 175 for more modules. If more modules were  
not found 176, then the Joey disconnects 182 from the Kangaroo.

The method then continues as set forth in FIG. 6.

5 If more modules were found 176, then the Joey retrieves 177  
an origin date for the next module. The Joey then compares 173  
the origin date of the next module to an origin date of a  
corresponding Kangaroo module. If the Kangaroo origin date were  
not more recent 174 than the origin date of the next module,  
then the Joey again searches for more modules and repeats the  
steps of retrieving 177 an origin date and comparing 173 that  
retrieved date to an origin date of a corresponding Kangaroo  
10 module for all remaining modules found. If the Kangaroo origin  
date were more recent 174 than the origin date of the Joey  
module being compared, then the Joey scans 178 for module blocks  
within the Kangaroo module having a more recent origin date than  
the origin date of the Joey module being compared. The Joey  
15 downloads 179 those Kangaroo module blocks having a more recent  
origin date than the origin date of corresponding Joey module  
blocks. The Joey then decompresses 180 the downloaded blocks,  
if these blocks were downloaded in a compressed format, and  
replaces 181 the corresponding older Joey module blocks with the  
20 downloaded Kangaroo module blocks.

After the first module has been updated, the Joey then  
scans 175 the modules folder for more modules. If more modules  
were not found 176, then the Joey disconnects 182 from the  
Kangaroo. The method then continues as set forth in FIG. 6. If  
25 more modules were found 176, then the Joey repeats the steps of  
retrieving an origin date 177 for the module found, comparing  
173 the origin date to an origin date of a corresponding

Kangaroo module, scanning 178 for module blocks having an origin date more recent than an origin date of corresponding Joey module blocks, downloading 179 those Kangaroo module blocks having an origin date more recent than the origin date of corresponding Joey module blocks, decompressing 180 the downloaded blocks, and replacing 181 older Joey module blocks with the downloaded Kangaroo module blocks.

Once the Joey has scanned the modules folder and has updated all modules found, the method continues as set forth in FIG. 6 with the Joey scanning 190 the alternate modules folder. If a module were not found 191 in the alternate modules folder, then the process for connecting to the Kangaroo network ends 192. If a module were found 191 in the alternate modules folder, then the Joey scans 193 from modem settings for an Alternate Kangaroo. If modem settings were not found 194, then the Joey alerts 195 the user that modem settings for the Alternate Kangaroo were not found. The Joey then opens 196 a modem settings dialog box. If in response to the modem settings dialog box the settings were not complete 197, then the Joey alerts 198 the user that the Joey could not contact the Alternate Kangaroo. The Joey then continues to scan 190 the alternate modules folder for modules within additional Alternate Kangaroos to which the Joey may subscribe. If no module were found 191 within an additional Alternate Kangaroo, the update process ends 192. If a module were found 191 within an additional Alternate Kangaroo, the Joey repeats the sequence of steps as set forth in FIG. 6 for contacting and updating from

the additional Alternate Kangaroo. As desired by the user, the process repeats until contact has been completed or attempted for all Alternate Kangaroos to which the Joey subscribes.

5 If, in response to the modem settings dialog box, the settings were complete 194, 197 then the Joey instructs 199 the modem to dial the Alternate Kangaroo. If a connection were not confirmed 200, then the Joey retries 201 to make a connection with the Alternate Kangaroo. If after retrying the connection were not confirmed 202, then the Joey alerts 203 the user that the Joey could not contact the Alternate Kangaroo. The Joey then continues scanning 190 the alternate modules folder for modules within additional Alternate Kangaroos to which the Joey may subscribe. If no module were found 191 within an additional Alternate Kangaroo, the update process ends 192. If a module were found 191 within an additional Alternate Kangaroo, the Joey repeats the sequence of steps as set forth in FIG. 6 for contacting and updating from the additional Alternate Kangaroo. As desired by the user, the process repeats until contact has been completed or attempted for all Alternate Kangaroos to which the Joey subscribes.

15 If a connection were confirmed 200, 202, then the Joey retrieves 204 an origin date for the first module. The Joey then compares 205 the origin date of the first module to an origin date of a corresponding Alternate Kangaroo module. If the Alternate Kangaroo's module did not have an origin date more recent 206 than the origin date of the Joey's module, then the Joey scans 207 the alternate modules folder for more modules.

If more modules were not found 208 then the Joey disconnects 215 from the Alternate Kangaroo. The Joey then scans 190 the alternate modules folder for modules within additional Alternate Kangaroos to which the Joey may subscribe. If no module were found 191 within an additional Alternate Kangaroo, the update process ends 192. If a module were found 191 within an additional Alternate Kangaroo, the Joey repeats the sequence of steps as set forth in FIG. 6 for contacting and updating from the additional Alternate Kangaroo. As desired by the user, the process repeats until contact has been completed or attempted for all Alternate Kangaroos to which the Joey subscribes.

If more modules were found 208, then the Joey retrieves 209 an origin date for the next module found. The Joey then compares 205 the origin date for the next module found to an origin date of a corresponding Alternate Kangaroo module. If the Alternate Kangaroo module's origin date were not more recent than the origin date of the next module 206 then the Joey continues to scan 207 for more modules, to retrieve 209 origin dates for additional modules found, and to compare 205 origin dates for additional modules found to corresponding Alternate Kangaroo module origin dates.

If the Alternate Kangaroo module's origin date were more recent than the origin date of the Joey's module 206, then the Joey scans 210 the Alternate Kangaroo module for module blocks within the Alternate Kangaroo module having origin dates more recent than the origin date of corresponding module blocks within the Joey's module. The Joey downloads 211 the Alternate

Kangaroo module blocks having origin dates more recent than the origin date of corresponding Joey module blocks. The Joey then disconnects 212 from the Alternate Kangaroo, decompresses 213 the downloaded blocks if the blocks were downloaded in compressed format, and replaces 214 corresponding older Joey module blocks with the downloaded Alternate Kangaroo module blocks.

The sequence of steps set forth in the flow diagram of FIG.6 is then repeated for any additional modules found within the alternate modules folder. If no additional modules are found 191, the update procedure ends 192.

To better illustrate the objects and advantages of the present invention, specific scenarios depicting the invention in use will be described. While the number of different screen displays that may be encountered during use of the present invention makes inclusion of all such screen displays impractical, FIGS. 7-11 provided a generalized representation of possible screen displays for purposes of illustration. FIG. 7 depicts the basic pop-up menu choices of "Materials" 301, "Properties" 302, "Concerns" 303, "Resources" 304, and "Search All" 305. Holding the mouse button down on the "Materials" 301 pop-up menu provides a listing of possible materials choices as depicted in FIG. 8. Holding the mouse button down on the "Properties" 302 pop-up menu provides a listing of possible levels and types of property characteristics as depicted in FIG. 9. Various considerations associated with a material may be further explored using the "Concerns" 303 pop-up menu to present

specific selection areas as depicted in FIG. 10. Finally, FIG. 11 provides a representative categorization of resources selectable using the "Resources" 304 pop-up menu. As can be seen from these representative screen displays, the system and method of the present invention may be readily adapted to any number of applications and may be easily updated and supplemented within each application as new information becomes available.

#### Scenario 1 - Industrial Design

In the first scenario, the Joey user is depicted as an industrial designer who is working on a project to design a solar powered street lamp. As part of this project, the industrial designer must specify a material from which the lamp housing will be constructed. This material could be aluminum, steel, plastic, etc. When choosing from these material choices, the industrial designer must be aware of the need to meet certain strength and hardness requirements for the street lamp application. These strength and hardness requirements are set forth by the Department of Transportation in a specialized set of codes for signs, signals, and lighting. The industrial designer may access these codes to determine the minimum tolerance for foot-pounds per square inch that a standing structure such as a solar powered street lamp must withstand to account for wind, collision, or related stress. Once a material has been selected, the industrial designer may use the network of the present invention to determine sources of supply for the chosen material. Finally the industrial designer can use the

network to locate a specific manufacturer or manufacturers capable of meeting the needs of the project.

In addition to the traditional considerations just set forth, current industrial designers may also wish to determine the extent to which a chosen material may be considered to be socially and environmentally responsible. In making such a determination, the designer may consider the use of recycled material.

When considering recycled material, the industrial designer of the present scenario needs to determine whether the supply of the recycled material is capable of matching the requirements of mass production associated with the street lamp. If the recycled material cannot meet these requirements, then the industrial designer may consider alternative materials which could be used which would still have minimal environmental impact throughout the product life cycle of the street lamp.

For the purposes of this scenario, it will be assumed that the industrial designer's Joey has been registered and so has full access to all Kangaroo resources. Accordingly, the industrial designer's Joey is set up in the materials format, with additional Kangaroo subscriptions to American Aluminum, GE Plastics, U.S. E.P.A., Miles Polymers, U.S. Steel, the Library of Congress, and the Smithsonian Institution. Subscriptions may be available with or without a fee dependent upon the subscription provider.

Once the industrial designer has sketched out the street lamp and has a design concept, the designer goes to his or her



computer terminal and launches the Kangaroo program. The industrial designer's first goal is to identify the minimum tolerance of foot-pounds per square inch required by the Department of Transportation of a standing structure to account for wind or collision on the side of the roadway. The industrial designer then conducts a search of the materials databases to find a common material that will satisfy the Department of Transportation's requirements. The industrial designer will then select that material having the least environmental impact. When this preliminary search is concluded, the designer will prepare a report detailing his or her research and recommendations.

Looking more specifically at the operation of the Kangaroo program once launched, the Joey scans the configuration folder and determines which databases are currently subscribed to by the Joey. The Joey then connects, using the modem, to the local Parent Kangaroo, and compares the origin dates of the Joey's databases to their counterparts at the Parent Kangaroo. If any of the origin dates at the Parent Kangaroo are newer than the corresponding origin dates of the Joey, the Joey requests a download of all new information for the respective databases from that or any other appropriate Parent Kangaroo.

Once all new information for the respective databases has been downloaded to the user Joey's memory, the designer selects "Alternate Kangaroos" from the resources pop-up palette. Selecting "Alternate Kangaroos" presents the designer with a dialog box asking whether or not the user wishes to limit the

search to only a certain country or region or whether to list all available Alternate Kangaroos. For the purposes of this scenario, the industrial designer decides to limit the search to only those Kangaroos within the United States.

5           Once the search has been limited, a new window opens, entitled "Alternate Kangaroo". From this window the industrial designer selects "Government Organizations" from the "Types" pop-up palette. The window is then entitled "U.S. Government" and has a scrolling list of available government organization  
10 Kangaroo databases. The designer then selects, using the mouse button, the list item named "U.S. Department of Transportation".

          The window is now entitled "U.S. D.O.T.", and has a welcoming screen explaining the D.O.T. Kangaroo and its contents. The screen informs the designer that he or she may  
15 subscribe to the entire D.O.T. Kangaroo, but that this is not suggested because the volume is quite large and may not be needed by anyone except a D.O.T. employee. The welcoming screen also lists different sections of the D.O.T. Kangaroo which may  
20 be subscribed to instead. The designer scrolls through this list and selects, using the mouse button, the list item named "Construction and Building Codes".

          The window is now entitled "D.O.T. Construction and Building Codes", and has a welcoming screen explaining the construction and building codes Kangaroo. The welcoming screen  
25 informs the designer that he or she may subscribe to the entire construction and building codes Kangaroo, but that this is not suggested, because the volume is quite large and may not be

needed by anyone except a D.O.T. contractor. The welcoming screen then lists different sections of the Kangaroo which may be subscribed to instead. The designer scrolls through this list and selects, using the mouse button, the list item named "Signs, Signals, and Lighting".

The window is now entitled "D.O.T. Codes for Signs, Signals, and Lighting", and has a welcoming screen explaining the signs, signals and lighting Kangaroo. The designer then goes to the pull-down Kangaroo menu at the top of the screen and selects "subscribe to" from the menu. A dialog box appears which tells the designer the name of the Kangaroo to which he or she is about to subscribe. From this dialog box, the designer can choose to subscribe to one of the higher level Kangaroos traversed in the search. For the purposes of this scenario, however, the designer does not need any additional databases, and so chooses the "OK" button.

The designer now has a subscription to the "D.O.T. Codes for Signs, Signals, and Lighting" Kangaroo. This subscription will keep itself up-to-date until the user unsubscribes.

After the designer clicks the "OK" button, an alert box appears on the designer's display screen that says "You have subscribed to a new Alternate Kangaroo. To use your new Kangaroo databases, close the current search window and select from your desk level resources palette. If you would like to subscribe to other databases from the current Alternate Kangaroo, continue navigating through the search window." Because, for the purposes of this scenario, the industrial

designer does not need any additional databases from the Department of Transportation, the designer clicks "OK" to clear the alert box, and then the close box on the "D.O.T. Codes for Signs, Signals, and Lighting" window. The designer is then back on the desk top and selects "D.O.T. Codes" from the "Resources" pop-up palette. Alternatively, the "Resources" pull-down menu at the top of the screen may be used.

A new window opens entitled "D.O.T. Codes for Signs, Signals, and Lighting". This window has four pop-up palettes entitled "Topics", "Requirements", "Issues", and "Resources". The designer selects "Street Lamps" from the "Topics" pop-up palette. The window is now entitled "Lighting" and has four pop-up palettes entitled "Types", "Requirements", "Issues", and "Resources". The designer selects "Tolerances" from the "Requirements" pop-up palette.

The designer now reads the minimum requirements for foot-pounds per square inch and minimum shear strength requirements for a street lamp. These specifications may be selected by the designer and dragged to the "notes" icon, where the selected text will be stored for later examination and/or printing. The designer then closes the "Lighting" window.

The designer is now back on the desktop and ready to begin searching materials. The designer selects the "Search All" icon to open a "Search All" dialog box. The designer then types in the name of a material, if known, including the physical requirements and any manufacturing restrictions known to the designer. Since the designer most typically only knows physical

requirements, this may be all of the information that is entered.

5 The designer then selects "All" from the "Search Databases" pop-up menu and then clicks the "OK" button. The "Search All" dialog box disappears, and a "List-1" window opens. This list is the result of the designer having selected "Search All". Double-clicking the mouse button on one of the materials listed in "List-1" will open an search window from the databases of the material selected. In the present scenario, instead of  
10 selecting a material, the designer returns to the "Search All" icon, and reopens the dialog box. The designer then enters the physical requirements learned from the Department of Transportation codes databases and specifies that the material must be recycled. When the designer clicks the "OK" button, the  
15 "Search All" dialog box disappears and a window entitled "List-2" appears. The "List-2" list is substantially shorter than the list presented in "List-1", because of the further requirement that the material be made of recycled substances. For the purposes of this scenario, "List-2" contains four materials:  
20 aluminum, steel, polycarbonate plastic, and ABS plastic.

The designer then double-clicks the mouse button on "Aluminum" in the "List-2" window, and a new search window entitled "Recycled Aluminum" opens. The search window specifies "recycled" because this was one of the properties specified in  
25 the second "Search All" command; if the designer had double-clicked on "Aluminum" in the "List-1" window, a window entitled "Aluminum" would have appeared, representing all the aluminum

databases.

The "Recycled Aluminum" window has four pop-up palettes entitled "Grades", "Properties", "Concerns", and "Resources". The designer reads the contents of the window's scrolling text field which explains the history of aluminum recycling, and how aluminum recycling is accomplished. The designer, interested in the cost, may go to the "Resources" pop-up palette and select "Prices".

The window is now entitled "Recycled Aluminum Prices", and a scrolling text field presents the names, phone numbers and addresses of different providers of recycled aluminum, organized alphabetically by location, with their respective prices. The average U.S. price may representatively be shown to be \$180 per ton.

The designer then clicks and holds the mouse button down on the "Full Record" icon at the top of the "Recycled Aluminum Prices" window and drags the icon on top of the "Notes" icon. This copies the full contents of the scrolling field in the current window into the designer's notes.

To determine what manufacturing processes can be used, the designer chooses to go back to the previous window to locate this information. To do this, the designer holds the mouse button down on the title in the window's title bar, and a list of previous windows appears. The user releases the mouse button on the name of the previous window or on the "go back one..." menu option. The window is now entitled "Recycled Aluminum" and has the same pop-up palettes as before. In response to the

designer selecting "Mfg. Processes" from the "Properties" pop-up palette, the window is now entitled "Recycled Aluminum Manufacturing Processes". The designer reads the scrolling text field and discovers that all conventional milling and machining techniques used for virgin or new aluminum can be used for recycled aluminum; no substantive mechanical or physical property differences exist between the recycled and the virgin material.

To determine the reasons why people might choose to use virgin instead of recycled aluminum, the designer returns to the "Resources" pop-up palette and selects "Prices". The window is now entitled "Recycled Aluminum Prices". The designer then selects "Virgin Aluminum" from the "Grades" pop-up palette.

The window is now entitled "Aluminum Prices", and a scrolling text field containing the names, phone numbers and addresses of different aluminum providers, organized alphabetically by location, with their respective prices is provided. The average U.S. price may representatively be shown to be \$200 per ton.

To determine the basis for the difference in the pricing between recycled and virgin aluminum, the designer goes to the "Properties" palette and selects "Origins". The window is now entitled "Aluminum Origins", and has a scrolling text field. As the designer reads the contents of this window, he or she learns about the high cost of mining and refinement of Bauxite, one of the primary elements of aluminum.

To continue searching, the designer returns to the previous

manufacturing window by holding the mouse button down on the title in the window's title bar to produce a list of previous windows. The designer releases the mouse button on "Recycled Aluminum Manufacturing Processes", causing the "Recycled Aluminum Manufacturing Processes" window to replace the "Aluminum Origins" window.

Based on this search and the completeness of the data provided using the present invention, the industrial designer may efficiently, effectively, and responsibly make the decision to use recycled, rather than virgin, aluminum in order to minimize costs and any adverse environmental impact. The industrial designer may also, however, consider the other materials presented in the "List-2" window using the present invention.

To consider the other materials, the designer closes the current search window by clicking the close box or by selecting the "Close Search Window" from the "File" pull-down menu. The designer then double-clicks on the item entitled "Steel" in the "List-2" window and follows a pattern of exploration and note-taking throughout this search similar to the search pattern used in the search of aluminum. The materials entitled "Polycarbonate Plastic" and "ABS Plastic" may also be searched in the same manner.

By the end of these searches the designer will have determined that ABS Plastic will meet the needs of the solar-powered street lamp the best but that, unfortunately, the supply of recycled ABS plastic is too low to meet the needs of full



production of 1000 or more lamps. Accordingly, the designer's decision to use recycled aluminum may be virtually final. The recycled aluminum materials and manufacturing costs will be under 105 dollars per lamp according to the informal estimates, received from five manufacturers in the Eastern United States, obtained during the search.

In addition to providing an efficient and timely research tool, the present invention also provides an effective means of presenting the designer's research findings to a client or sponsor for approval.

To prepare such a presentation, the designer selects "Print" from the "File" menu at the top of the screen, to open a printing set-up dialog box. From here the designer selects, through a series of checkboxes, desired documentation for printing. For the purposes of this scenario, the designer checks the box labeled "Complete report of each window from the Session". The "Pages" indicator shows that the document to be printed is 43 pages long. To assist the client in navigating the report, the designer checks off the box labeled "Outline", which will limit the print-out to just the names of each search and subsequent window. The "Pages" indicator now shows that the document to be printed is only 2 pages longer. The designer then clicks the "Print" button to begin printing.

The designer may also want to review and print out a copy of the notes taken during the search for his or her own records. To do so, the designer clicks the mouse button on "Notes" from the "Kangaroo" pull-down menu. A window entitled "untitled

Kangaroo Session notes" appears with a scrolling text field. The designer reads through the notes, edits out any unnecessary information, and adds comments where appropriate. The designer then goes to the "File" pull-down menu and selects "Print...", checks the box labeled "Notes", and then clicks "O.K."

The search and documentation now complete, the designer quits using Kangaroo by going to the "File" pull-down menu and selecting "Quit". An alert box appears with the message "This Kangaroo Session has not be saved, and will not be able to be recalled if it is not saved. Would you like to save it now?" Clicking the mouse button on the "Save" button produces a standard file save dialog box, into which the designer enters a name under which the session is to be saved, followed by clicking the "O.K." button. The file is saved, and Kangaroo Quits.

#### Scenario #2 - Library Parent Kangaroo

In the second scenario, a public library serves as the Parent Kangaroo. The primary purpose of the public library system is to provide access to books and other information for members of the public generally. The library administration wants to take part in programs that will help the library to be a valuable resource to the community, by fostering educational and intellectual growth. Because of the already established infrastructure and lending mechanisms associated with the public library system, the public library system provides ideal setup sites for the Kangaroo network of the present invention.

5 The first need of the library is to organize and provide access to the library's own collection, with the second need being to organize and establish the access mechanism to other resources. Budgetary concerns are an ongoing obstacle to the further development of most libraries and must be taken into consideration.

10 For this scenario the Kangaroo configuration comprises one Parent Kangaroo or server, organized in the library format, and several Joey or client stations, the number to be determined appropriate to the average number of library users.

15 The library must first configure the Parent Kangaroo by registering the Parent Kangaroo as a server with the Kangaroo network. When registering, the library provides its zip code and modem phone number so that the network can locate the library. The library is then assigned a Parent Kangaroo access number, which will serve as the library's Kangaroo network identity.

20 The subscribing library enters its name as it will appear on the network, e.g., Anytown, N.Y., PL#2, which stands for public library number 2 in Anytown, New York. If the library were a State University, the identity would be the university acronym, N.Y.S.U.A. for New York State University at Anytown, and library number, resulting in N.Y.S.U.A.#1.

25 As the next step, the library selects an organizational format from the Parent Kangaroo configurations. Because it is a library, the standard "Library" format would most likely be selected. Using the "Library" format, the top level pop-up

palettes include "Subject", "Author", and "Title". Unless specified otherwise, the contents of each palette include an A-Z categorization.

5 The library then enters the contents of its current collection. This can be done by entering manually or, since most libraries already have their collections in a database format, the library can import the information. After the information has been imported, the Parent Kangaroo will also need to know the general contents or subject of each entry so  
10 that the Kangaroo can cross reference to other entries. If the previous database has related subjects listed for each entry in its databases, this may be accomplished from the import mechanism.

15 The next step is to register the library's Joeys. These Joeys are locked by the Parent Kangaroo, meaning that they will not be able to select a different default Parent Kangaroo or store any downloaded information beyond the Joey's rewritable buffer. (The rewritable buffer stores any information  
20 downloaded but will replace stored information once the buffer has been filled. For a dedicated Joey station, the limit to the buffer is the capacity of the hard drive.) The locked Joeys will still be able to subscribe to Alternate Kangaroos with library approval.

25 At this point the library Kangaroo system is fully functioning. The Parent Kangaroo begins receiving information from any Alternate Kangaroos to which it has subscribed. Such Alternate Kangaroos may include the Library of Congress or the

Smithsonian Institution. If the Parent Kangaroo subscribes to the Library of Congress, the Parent Kangaroo will receive the digital version of each of the books the Library of Congress has in its collection, so that the books may be viewed and referenced from each Joey station. If the Parent Kangaroo subscribes to the Smithsonian Institute, the Parent Kangaroo will begin receiving scanned images of the Smithsonian collections and databases. As this process could take a long time and take up a large amount of storage at each site, the Parent Kangaroo can limit the detail or depth of each subscription, so that only the top level or levels of each subscription may be transferred; each time a Joey accesses beyond those points, the information would be downloaded from the Alternate Kangaroo to the using Joey.

Through the network of the present invention, the library is able to provide the library users, with minimal effort and cost, access to almost endless information, and can afford to spend more time and effort on community projects, knowing that the library's current collection is accessible to people at the library and anywhere in the world. The library will save space and money, subscribing to book depositories and magazines and newspapers via the Kangaroo network, and obviating the need to store the physical copies. As opposed to being subject to the traditional restrictions of building size, and budget limits, the library equipped with the network of the present invention is primarily limited by its digital storage capability.

### Scenario #3 - XYZ Plastics Inc.

As a third scenario, a company, XYZ Plastics Inc., needs to provide customers and potential customers with information about various products and plastic resins. XYZ Plastics has a large Research and Development division that is constantly modifying and creating new resins. Distribution of printed information is cost-prohibitive, due to the constantly changing nature of the information. XYZ Plastics has a large reference library and many research associates devoted to gathering information about products from competing companies and other related chemical industry sources of information. This reference library has had exponentially increasing costs due to rapid advances in the industry.

XYZ Plastics has two Parent Kangaroos. One is dedicated to in-house use only, meaning it is not connected to a phone line. This dedicated Parent Kangaroo stores the company's proprietary information, and has different levels of security. The second Parent Kangaroo is connected to a phone line and holds product information, press releases and databases for public access; the second Parent Kangaroo also acts as a gateway for employees to research Alternate Kangaroos outside the company. Both Parent Kangaroos are set up in a slightly modified Materials Format. XYZ Plastics has 386 Joeys, for 515 employees, connected to both Parent Kangaroos.

XYZ Plastics must first configure its Parent Kangaroos by registering the Parent Kangaroos as servers with the Kangaroo network. When registering, XYZ Plastics provides its zip code

and modem phone number so that the network can locate the XYZ  
Plastics Kangaroo; the company only provides this information  
for one of its Parent Kangaroos, since the dedicated in-house  
Kangaroo will not be connected to a phone line for outside  
access. XYZ Plastics is then assigned a Parent Kangaroo access  
number, which will serve as the company's Kangaroo network  
identity.

XYZ Plastics then enters its name as it will appear on the  
network. After entering "XYZ Plastics" the company selects an  
organizational format from the Parent configurations. Because  
XYZ Plastics is a plastics manufacturer, XYZ Plastics selects  
the standard "Materials" format. Using this format, the top  
level pop-up palettes include "Materials", "Properties", and  
"Concerns"; XYZ Plastics can change the "Concerns" palette to be  
the "Pricing" palette. Unless specified otherwise, the contents  
of each palette are in an A-Z categorization.

XYZ Plastics then enters the contents of its existing  
databases. This can be done by entering manually or, since XYZ  
Plastics already has its databases in another format, XYZ  
Plastics just imports the information. After the information  
has been imported, the Parent Kangaroo will also need to know  
the general contents or subject of each entry, so that the  
Kangaroo can cross reference to other entries. If the previous  
database has related subjects listed for each entry in the  
databases, this may be accomplished from the import mechanism.

The next step is to register the company Joeys. These  
Joeys will be partially locked by the Parent Kangaroo, meaning

that they will not be able to upload any information to the public Parent Kangaroo, or to an Alternate Kangaroo. The partially locked Joeys will, however, still be able to subscribe to Alternate Kangaroos.

5           At this point the XYZ Plastics Kangaroos are fully functioning. The public Parent Kangaroo begins receiving information from any Alternate Kangaroos to which it has subscribed. If one of these Alternate Kangaroos is the Society of Plastics Engineers, for example, XYZ begins receiving all of  
10           the databases located at the S.P.E. Kangaroo. If the company subscribes to G.E. Plastics, the public Kangaroo begins receiving all of the databases located at the G.E. Plastics Public Kangaroo.

15           Using the present invention, XYZ Plastics is able to provide current accurate information about all of its products to any potential customers, and is also able to receive feedback from those potential customers. The network of the present invention also provides a way for XYZ Plastics' internal documents and research to be organized and accessed by XYZ  
20           Plastics employees. The research being done at the company is more efficient, and thus more cost effective, because the employees can conduct research on almost any topic from their desk, or in the laboratory.

#### Scenario #4 - Simple Subscription Description

25           As a fourth scenario, a subscriber to a magazine wants to receive the magazine every month on time. The magazine



publisher wants to reduce the overhead costs and environmental impact of its publishing, while still retaining the quality of the magazine.

To meet the needs of both the subscriber and the publisher, the subscriber receives a free version of the Joey or client software allowing the subscriber to receive not only the subject magazine, but also any other magazine, as released, directly to the subscriber's home or office computer, without any effort, or lost work time. The Joey may also access other services using a Kangaroo, such as libraries, schools, newspapers, T.V. shows (when technology allows), etc.

In this scenario, the publisher becomes a Parent Kangaroo or server and provides subscribers with an electronic version of the publisher's magazines. Because every page of a magazine is laid out on a publisher's computer, when the magazine is ready to print it is simply added to the publisher's Parent Kangaroo file list, and the publishing is complete - with an overhead cost savings of approximately 70%. These cost savings could be passed directly to the subscribers, devoted to the content of the magazine, or both. Kangaroo publishing may also be used to substantially reduce the environmental impact of publishing, and allow electronic searching and cross referencing of magazine articles with back issues and with other magazine articles on related topics.

It will be apparent to those skilled in the art that various modifications can be made to the on-line database updating network and method of the present invention without



The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A computer-readable medium having computer-executable components for updating modules of information via a communications channel interconnecting a plurality of computers, wherein each module of information includes a plurality of module blocks of information, the computer-readable medium having computer-executable components comprising:

(a) a comparison component for comparing an out-of-date module of information stored in memory of a first computer to an updated module of information stored in memory of a second computer to identify which module blocks in the updated module of information contain more recent information;

(b) a download component for downloading from the second computer to the first computer, only the module blocks of the updated module containing more recent information that were identified by the comparison component; and

(c) an update component for replacing corresponding module blocks in the out-of-date module with the module blocks of the updated module containing more recent information that were downloaded by the download component.

2. The computer-readable medium of Claim 1, wherein the comparison component identifies which module blocks in the updated module of information contain more recent information by comparing each module block of the updated module of information to each module block of the out-of-date module of information.

3. The computer-readable medium of Claim 1, wherein the comparison component identifies at least one new module block within the updated module of information that does not correspond to a module block in the out-of-date module, the download component downloads from the second computer to the first computer via the communication channel the at least one

new module block of information identified by the comparison component, and the update component updates the out-of-date module with the at least one new module block downloaded by the download component.

4. A method for updating modules of information via a common communications channel interconnecting a plurality of computers, the method comprising:

(a) identifying a first module containing information to be updated, wherein the first module is stored in memory of a first computer, and wherein the first module comprises a plurality of first module blocks;

(b) identifying a second module containing more recent information than the first module, wherein the second module is stored in memory of a second computer, and wherein the second module comprises a plurality of second module blocks;

(c) identifying which second module blocks contain more recent information than the first module blocks;

(d) downloading via the common communications channel the identified second module blocks from memory of the second computer to the first computer; and

(e) updating the first module stored in memory of the first computer with the more recent information contained in the identified second module blocks downloaded from memory of the second computer.

5. The method of Claim 4, further comprising repeating (b) through (e) of Claim 4 for each of a plurality of modules identified as containing information to be updated.

6. The method of Claim 4, wherein identifying the second module containing more recent information than the first module comprises comparing the first module to the second module to determine if the second module contains more recent information than the first module.

7. The method of Claim 6, wherein identifying which second module blocks contain more recent information than the first module blocks comprises comparing each second module block to each first module block to determine if the second module block has more recent information than the first module block.

8. The method of Claim 4, wherein updating the first module stored in memory of the first computer comprises updating each of the first module blocks with the more recent information contained in each of the identified second module blocks downloaded from memory of the second computer.

9. The method of Claim 4, further comprising:

(a) identifying an nth module containing more recent information than the first module, wherein the nth module is stored in memory of an nth computer and wherein the nth module comprises a plurality of nth module blocks;

(b) identifying which nth module blocks contain more recent information than the first module blocks;

(c) downloading via the common communication channel the identified nth module blocks from memory of the nth computer to the first computer; and

(d) updating the first module stored in memory of the first computer with the more recent information contained in the identified nth module blocks downloaded from memory of the nth computer.

10. The method of Claim 9, wherein at least one of the first module, the second module and the nth module comprises a module of information nested within another module of information.

11. The method of Claim 4, further comprising:

(a) identifying an nth module containing new information, wherein the nth module is stored in memory of an nth computer, and wherein the nth module comprises a plurality of nth module blocks;

(b) identifying which nth module blocks contain new information;

(c) downloading via the common communication channel the identified nth module blocks from memory of the nth computer to the first computer; and

(d) updating the first module stored in memory of the first computer with the new information contained in the identified nth module blocks downloaded from memory of the nth computer.

12. A method of updating outdated information stored in memory of a first peer computer with more recent information stored in memory of a second peer computer, wherein the first peer computer and the second peer computer are interconnected via a common communications link, the method comprising:

(a) comparing a module of outdated information stored in memory of the first peer computer to a module of more recent information stored in memory of the second peer computer, wherein the module of outdated information includes a plurality of module blocks at least one of which contains outdated information, and wherein the module of updated information includes a plurality of module blocks at least one of which contains updated information and corresponds to the at least one module block of outdated information;

(b) downloading via the network the at least one module block of updated information from the first peer computer to the second peer computer; and

(c) replacing the at least one module block containing outdated information with the at least one module block containing updated information which was downloaded via the common communications link.

13. The method of Claim 12, wherein comparing the module of outdated information stored in memory of the first peer computer to the module of more recent information stored in

memory of the second peer computer comprises comparing each module block of outdated information to a corresponding module block of updated information to identify the at least one module block containing updated information.

14. The method of Claim 13, wherein comparing each module block of outdated information to a corresponding module block of updated information identifies a plurality of module blocks in the updated module containing updated information, wherein the plurality of module blocks containing updated information are downloaded via the network from the first peer computer to the second computer, and wherein the module blocks containing outdated information are replaced with the plurality of module blocks containing updated information.

15. A method for updating information stored in memory of a subscribing computer connected to a publishing computer via a network, the method comprising:

- (a) subscribing to published information stored in memory of the publishing computer;
- (b) comparing the information stored in memory of the subscribing computer to the published information stored in memory of the publishing computer;
- (c) responsive to the published information stored in memory of the publishing computer having been changed from the information stored in memory of the subscribing computer, identifying which published information stored in memory of the publishing computer has been changed;
- (d) downloading from the publishing computer to the subscribing computer via the network only that published information which has changed from the information stored in the memory of the subscribing computer; and
- (e) updating the information stored in memory of the subscribing computer only with that published information which has changed and has been downloaded from the publishing computer.

16. A method of updating a plurality of user modules of information via a network interconnecting a host computer and a user computer, the user computer having a user memory for storing user modules, each user module including a plurality of user module blocks, the host computer having a host memory for storing host modules, each host module including a plurality of module blocks, the method comprising:

(a) identifying a first user module stored in user memory, wherein at least one first user module block of the first user module comprises a second user module of information;

(b) identifying a first host module stored in host memory that corresponds to the first user module, wherein each first host module block corresponds to a first user module block, wherein at least one first host module block comprises a second host module of information, and wherein the second host module corresponds to the second user module;

(c) comparing the first host module to the first user module to determine if the first host module contains more recent information,

(d) if the first host module contains more recent information, comparing each first host module block to the corresponding first user module block to determine if the first host module block contains more recent information than the corresponding first user module block;

(e) if the first host module block comprises a second host module of information, comparing each second host module block to the corresponding second user module block to determine if the second host module block contains more recent information than the corresponding second user module block;

(f) downloading via the network, each host module block containing more recent information into user memory; and

(g) updating each corresponding user module block with the corresponding downloaded host module block.




# ABSTRACT

An on-line database updating network system and method using object-oriented programming to build a program of discrete blocks, with each block being separately accessible, modifiable, and replaceable. The system includes a user terminal, a host terminal, and a communications channel. Origin dates of user module blocks of information stored in the user terminal are compared, over the communications channel, with origin dates of corresponding host module blocks of information stored in the host terminal. Host module blocks having origin dates more recent than corresponding user module blocks are downloaded as updated blocks over the communications channel to the user terminal. The downloaded updated blocks are then used to update the relevant user module blocks of information. Alternate host terminals may also be accessed by the user terminal, and updated alternate host module blocks of information may be downloaded to the user terminal.

T:\DOCUMENT\CMBL\CMBL01US.AP-SCB05/24

Fig. 1.

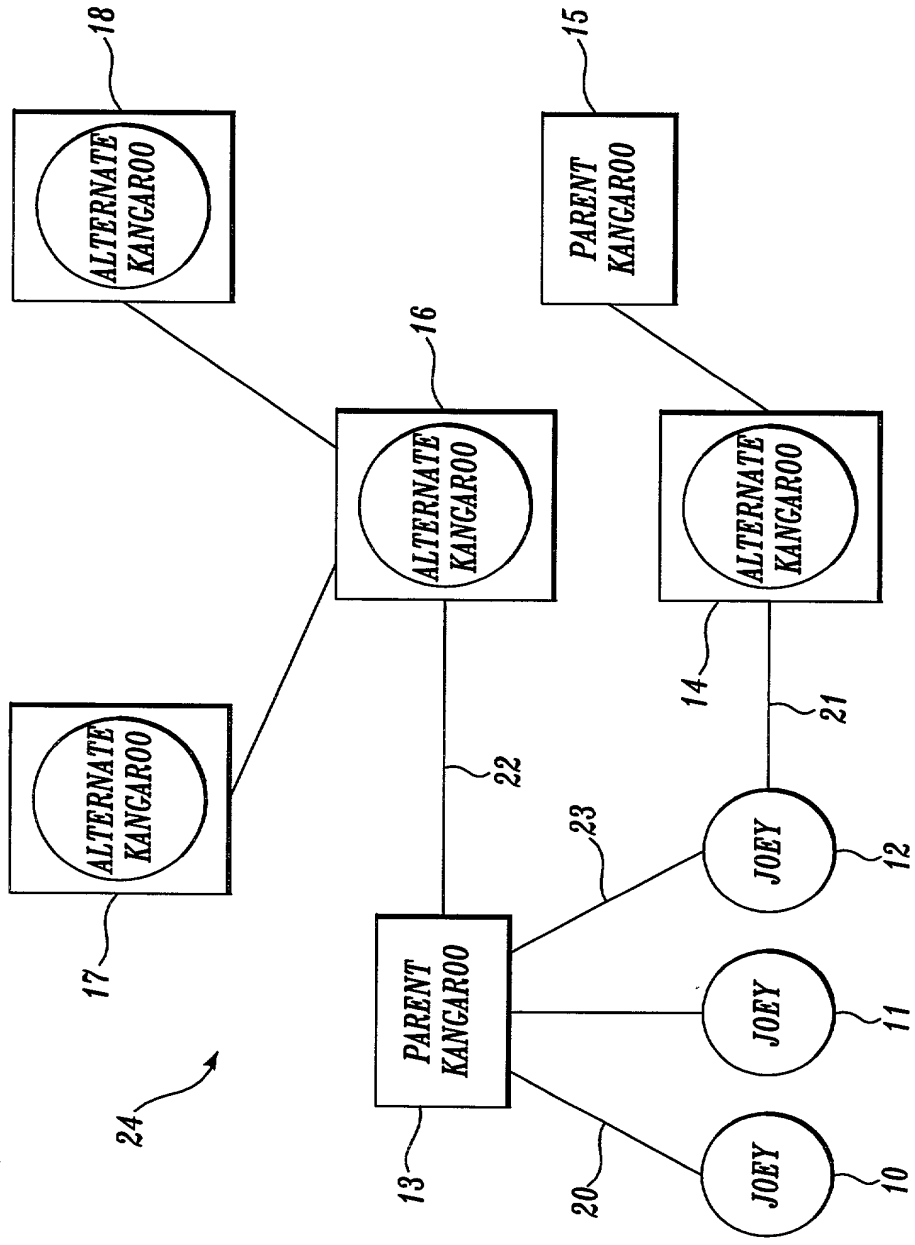

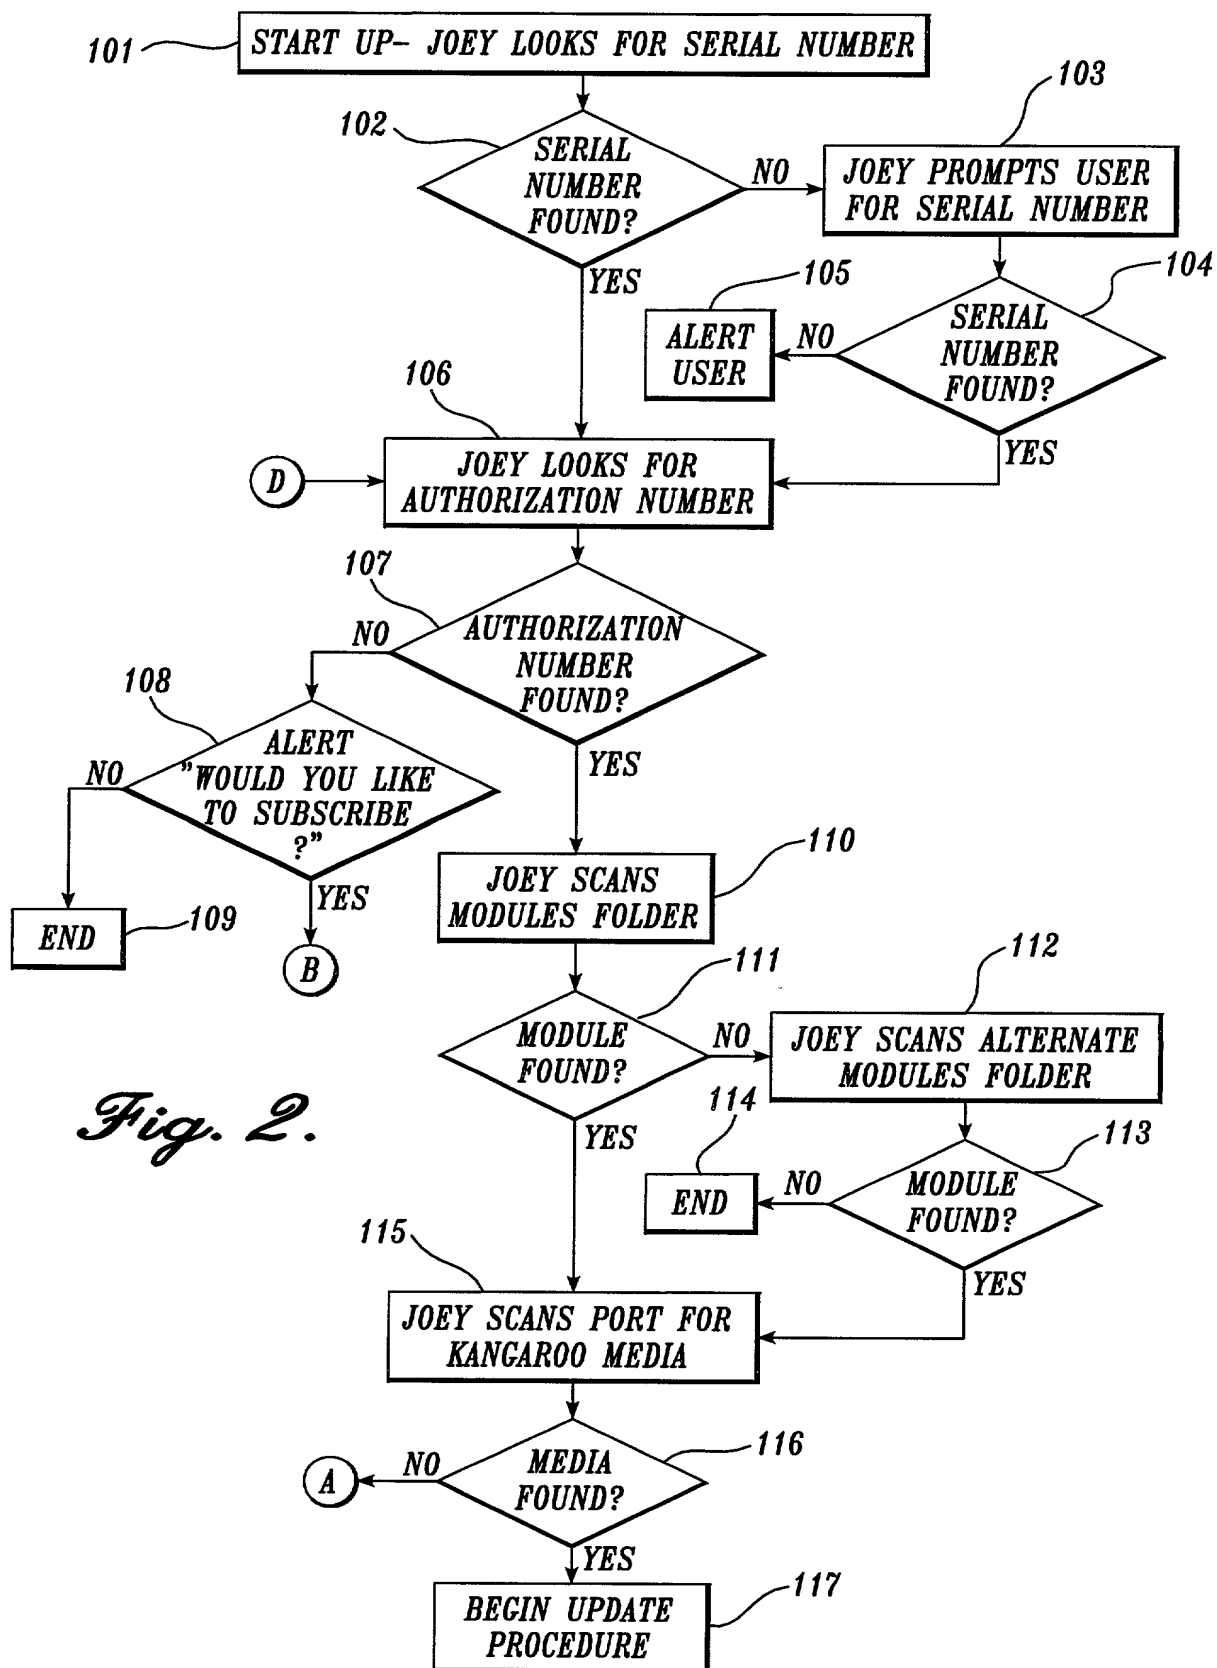


Fig. 3A.


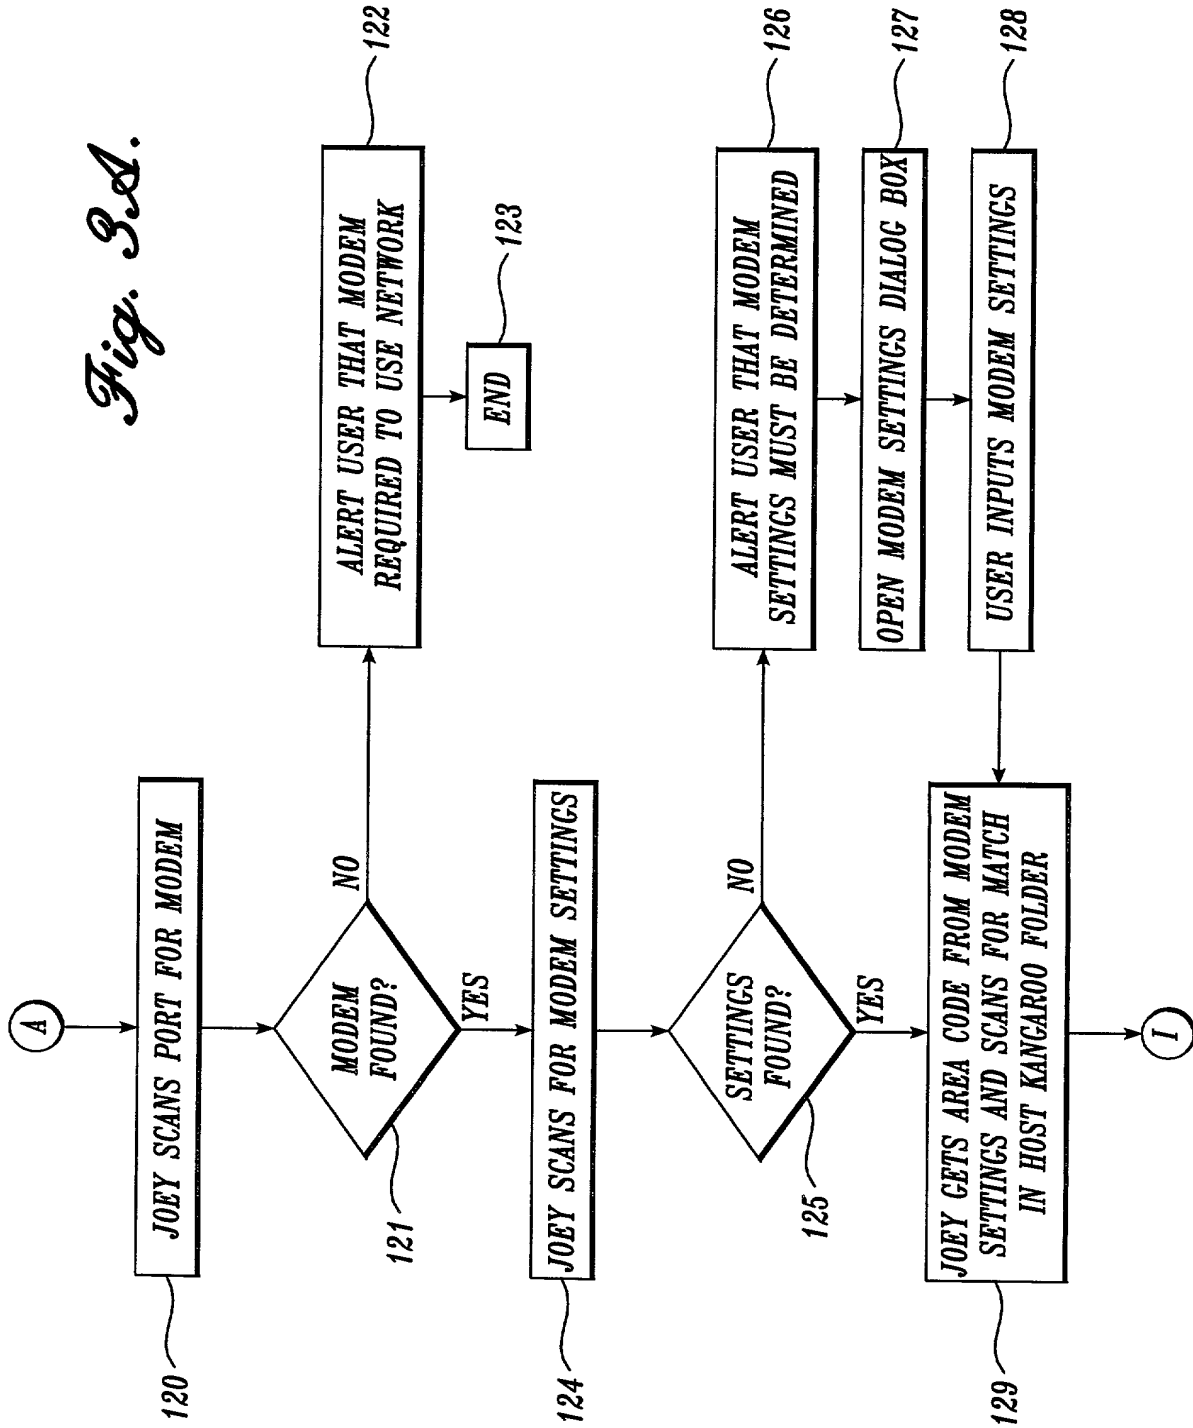


Fig. 3B.

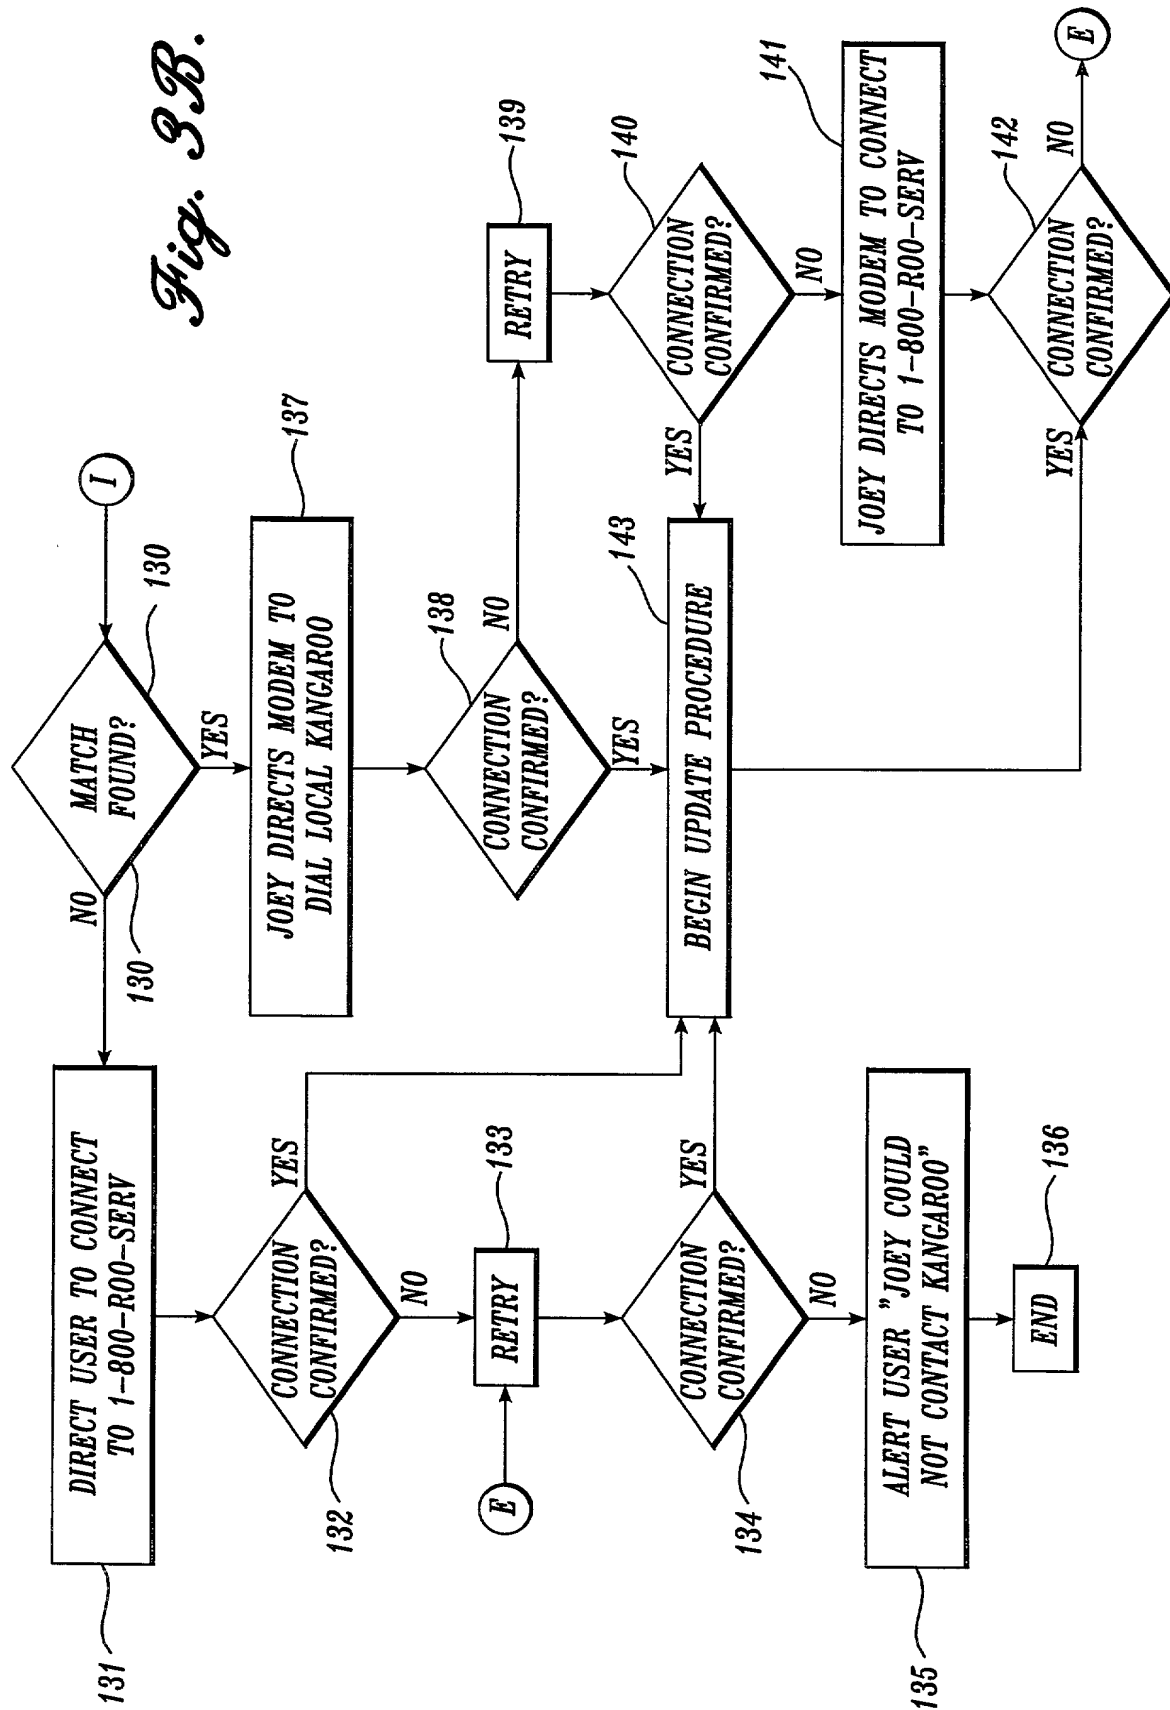

5/14

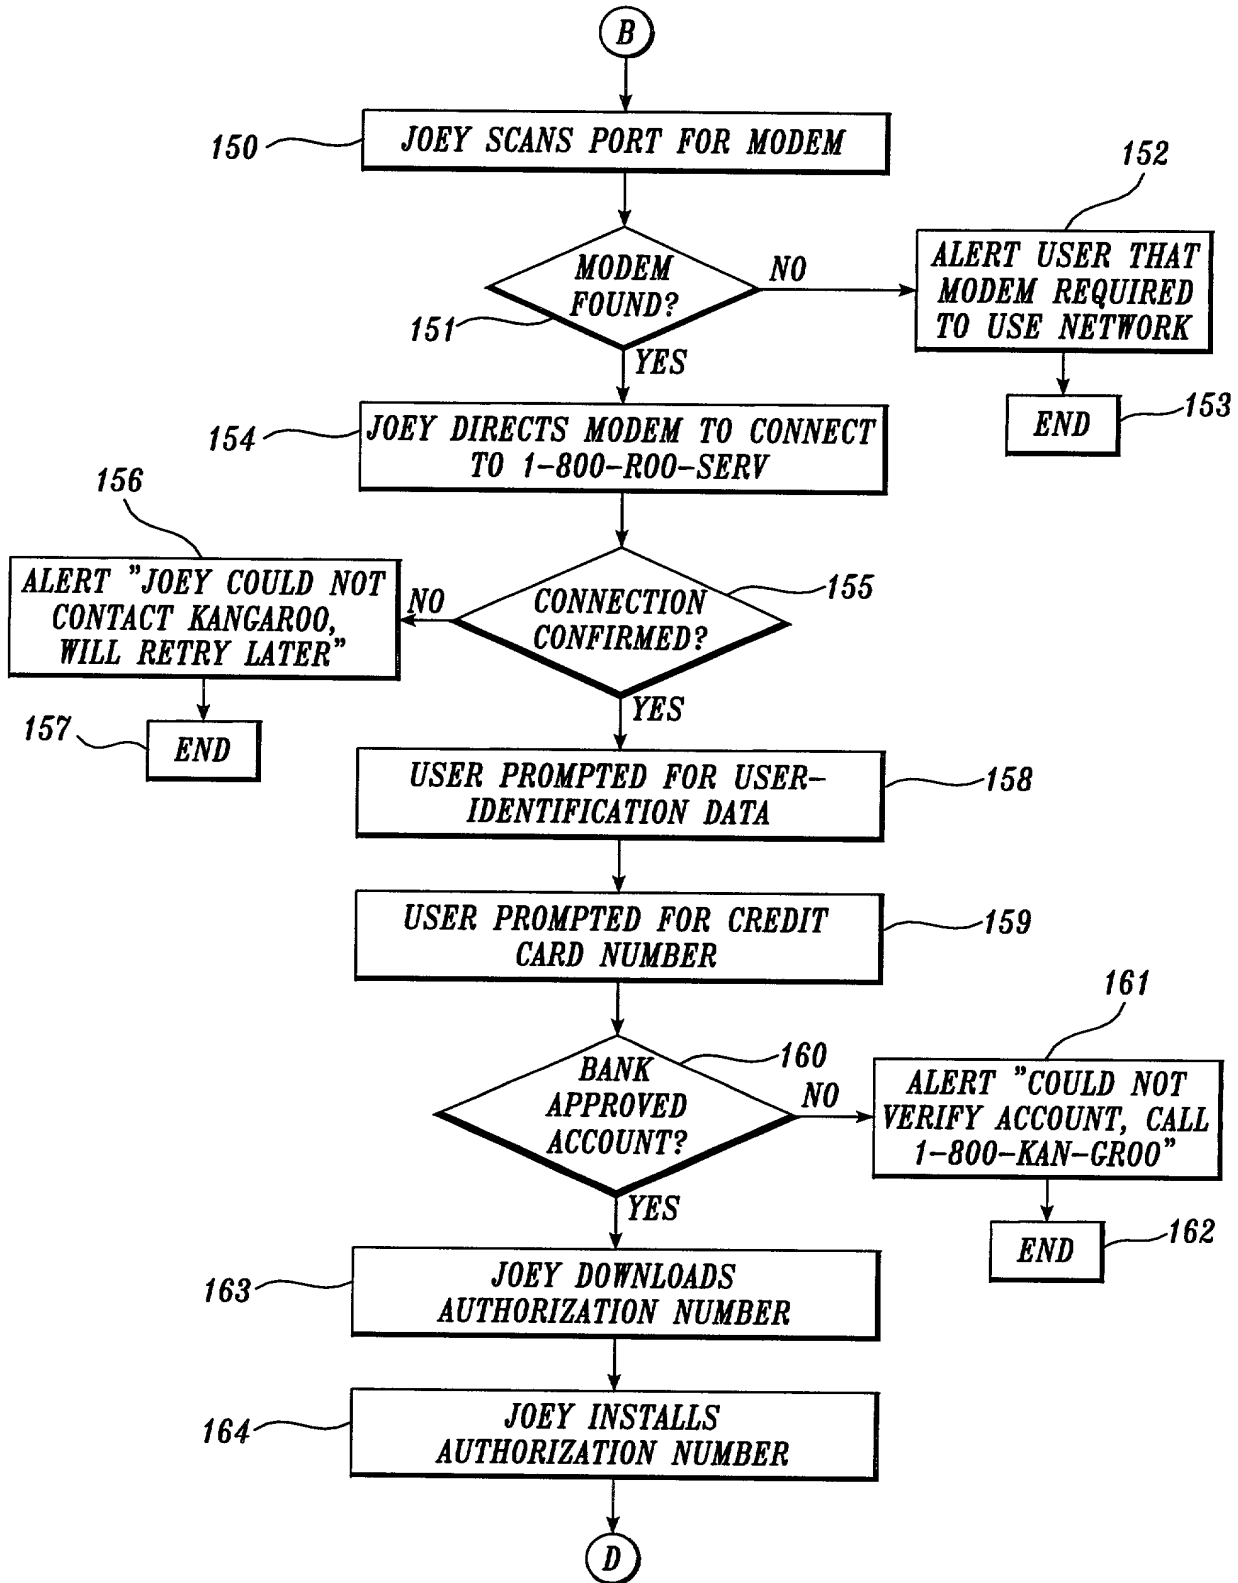
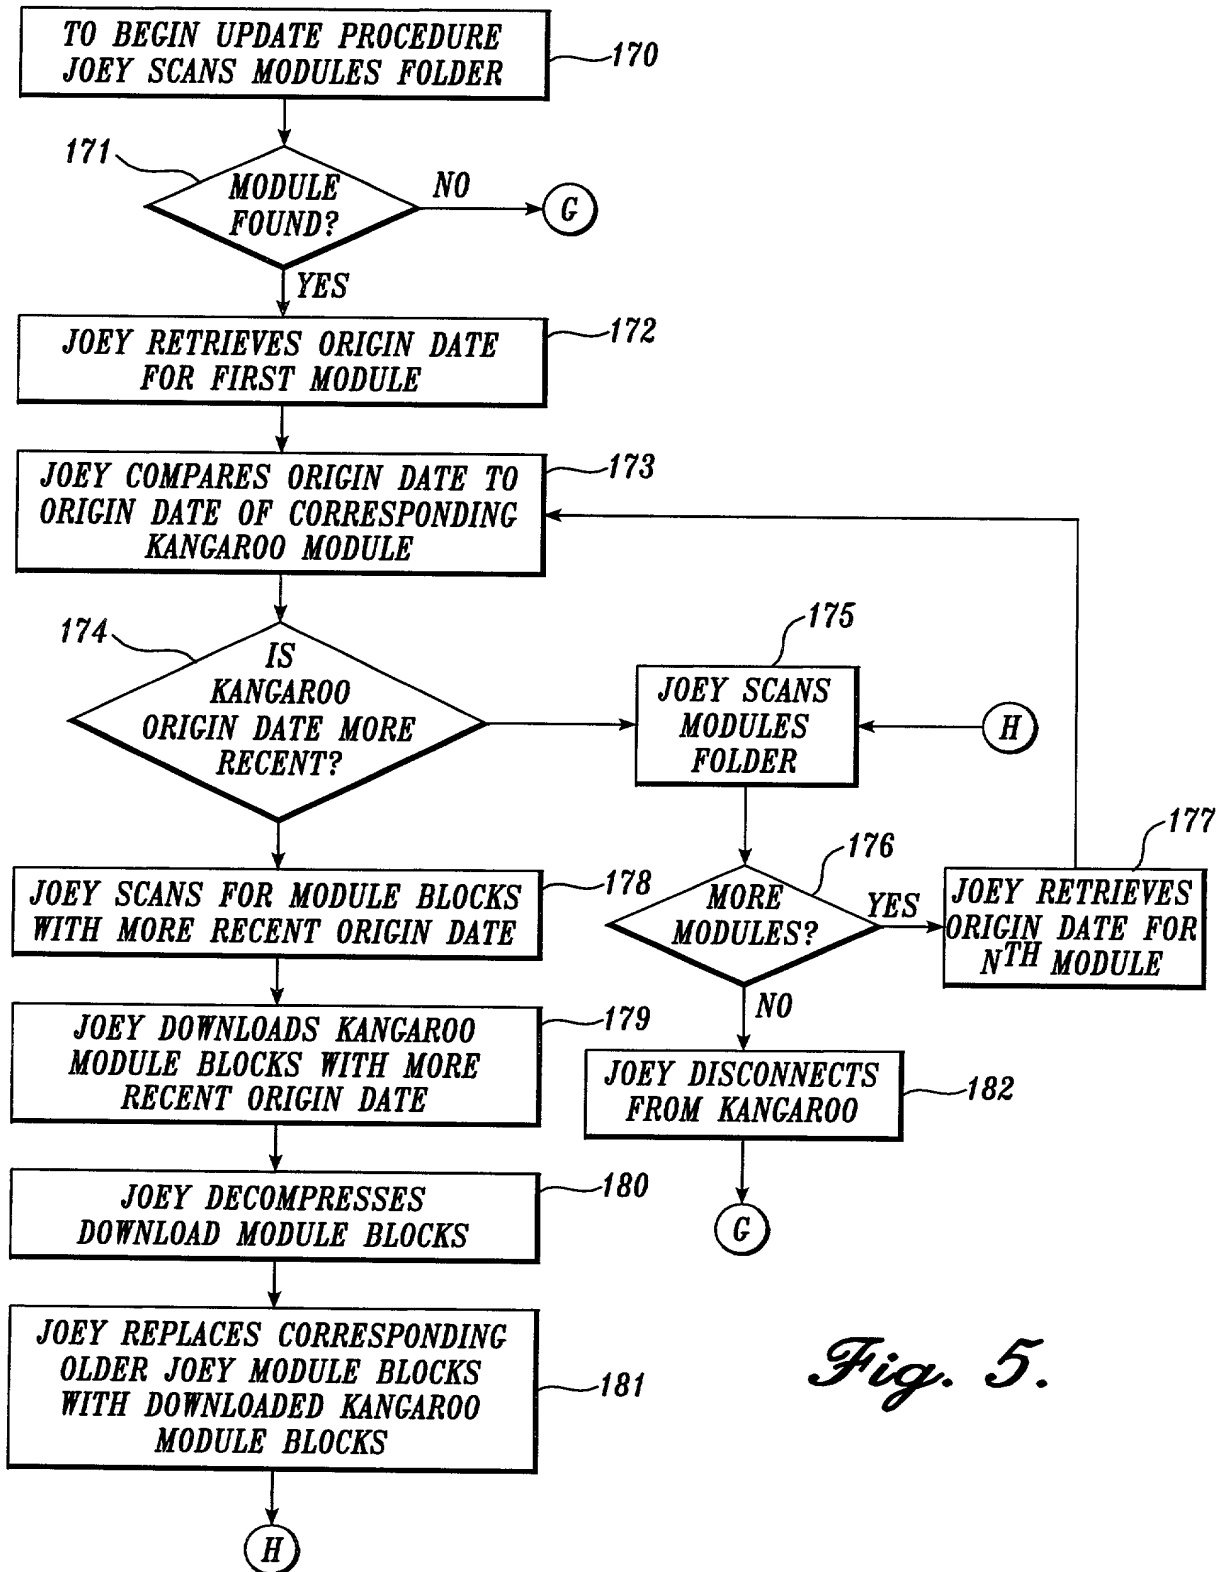


Fig. 4.

*Fig. 5.*

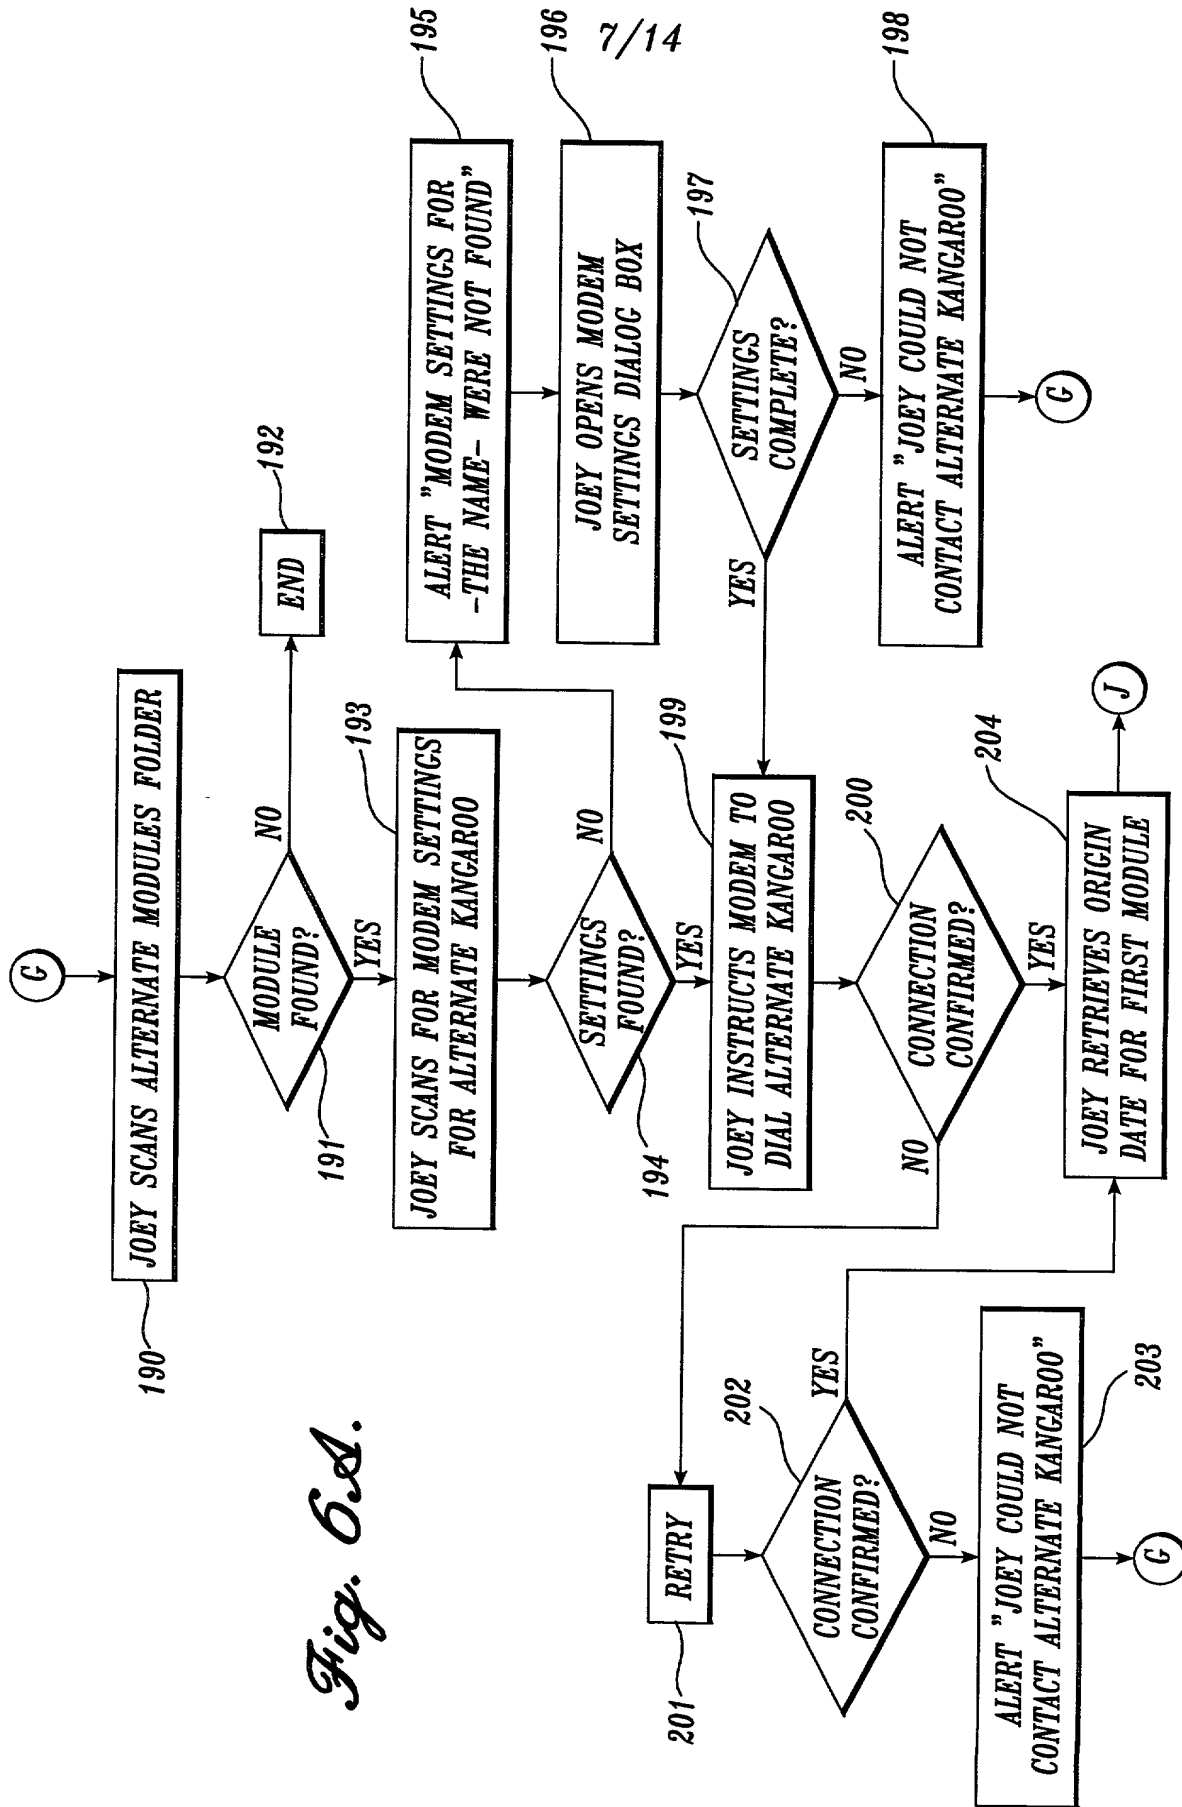
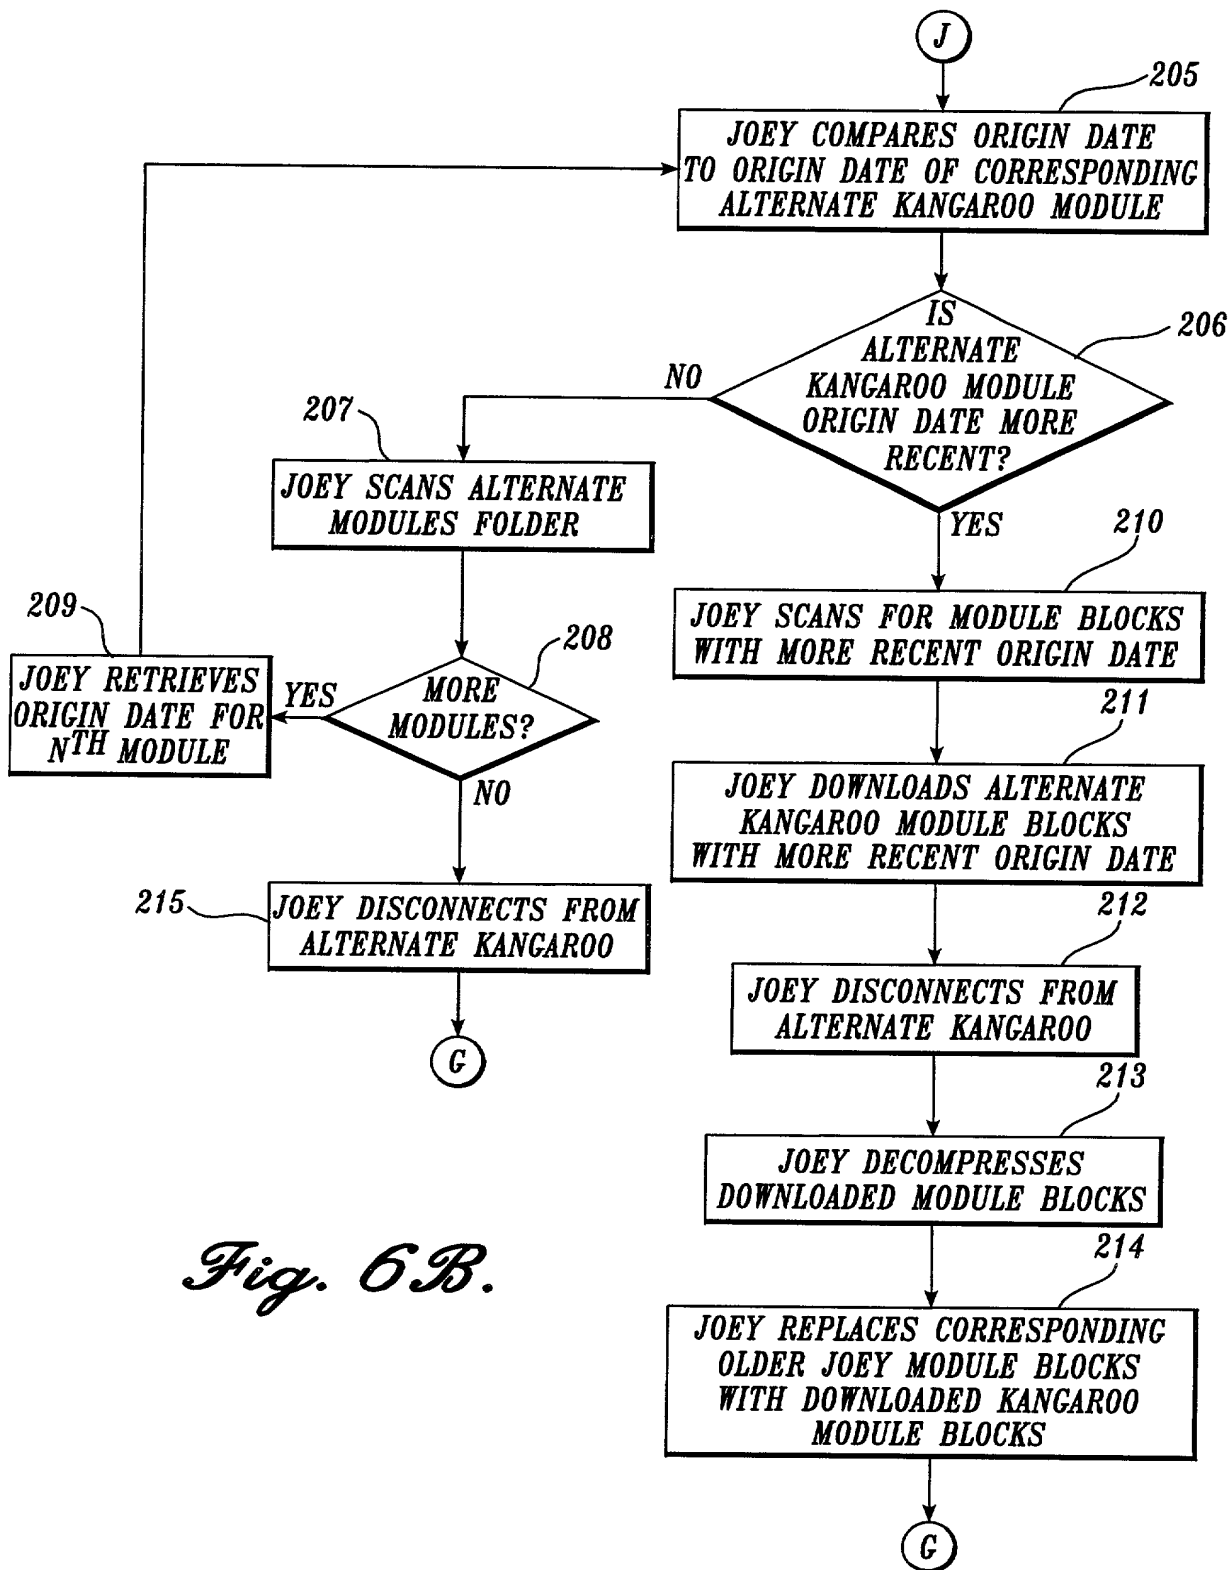
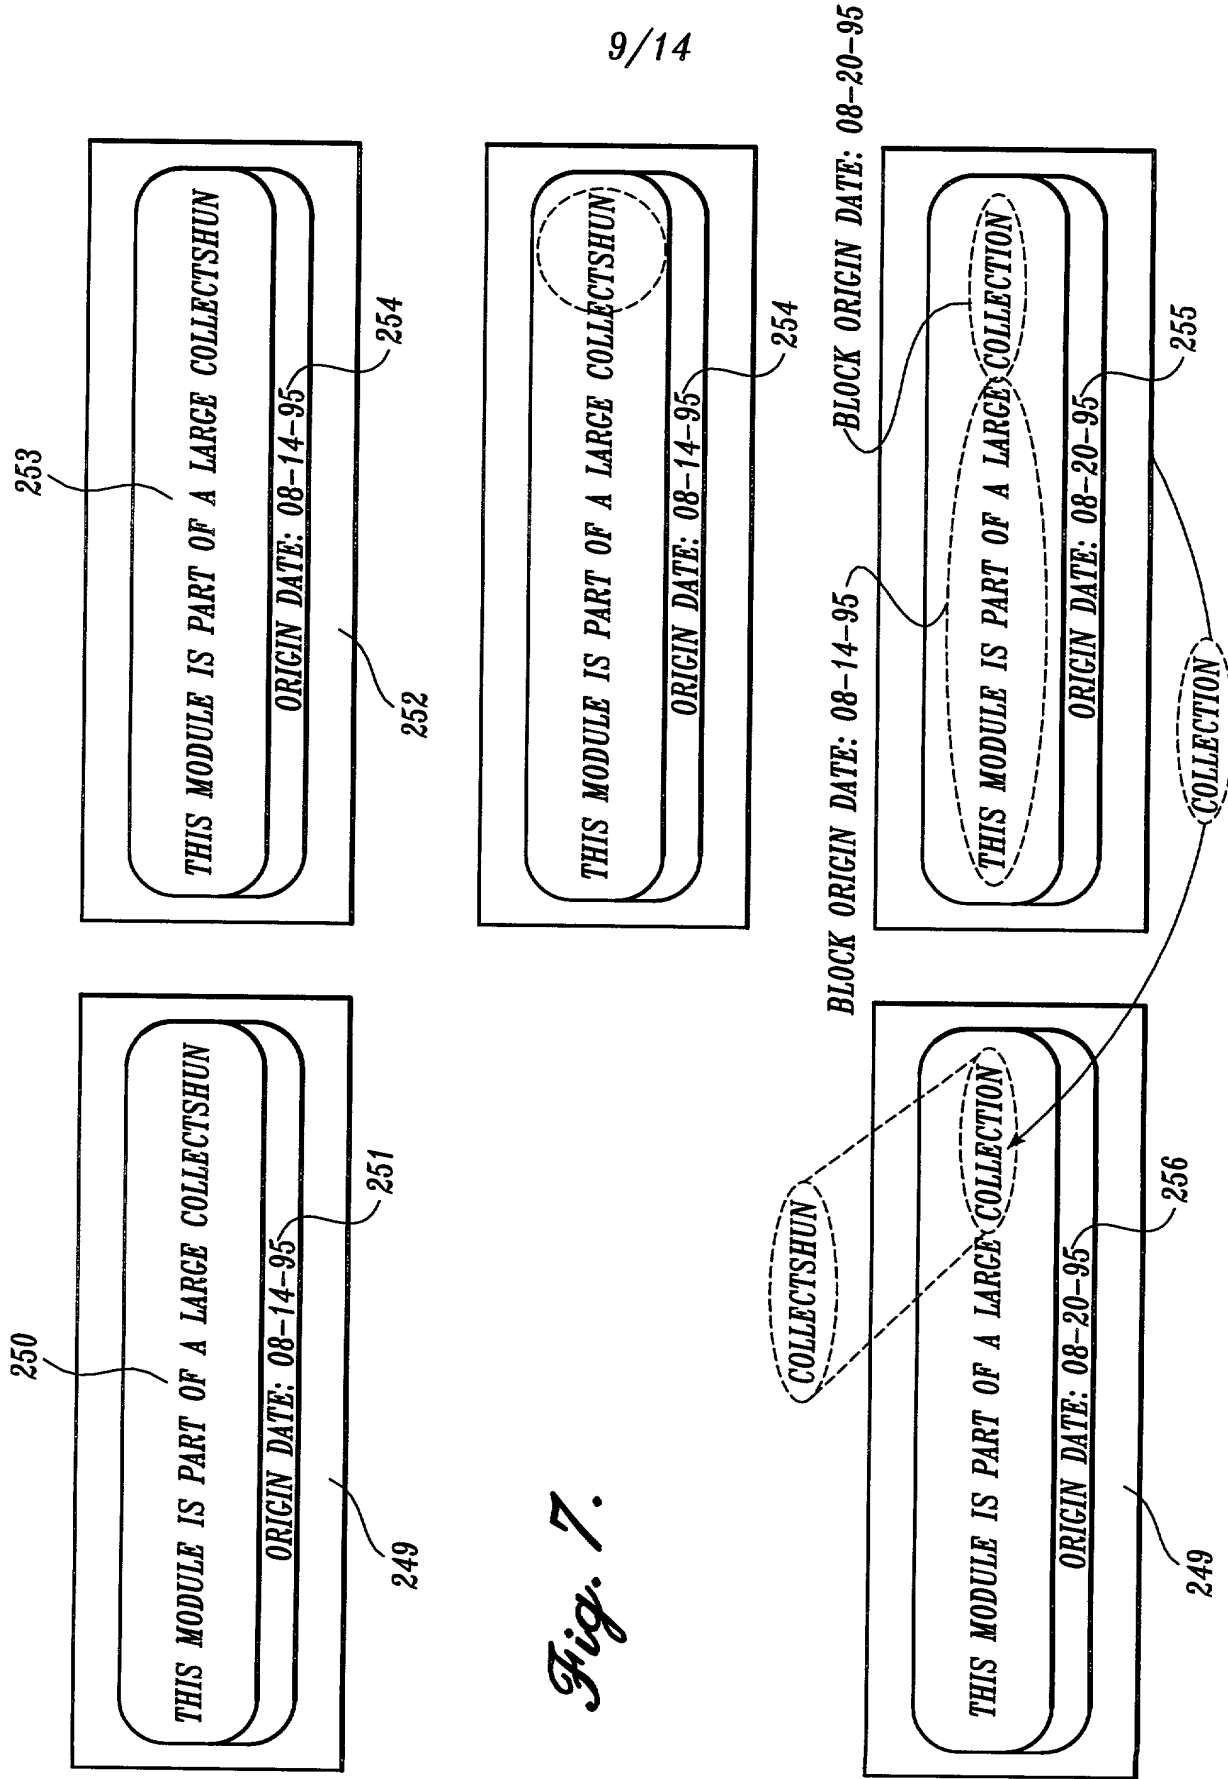
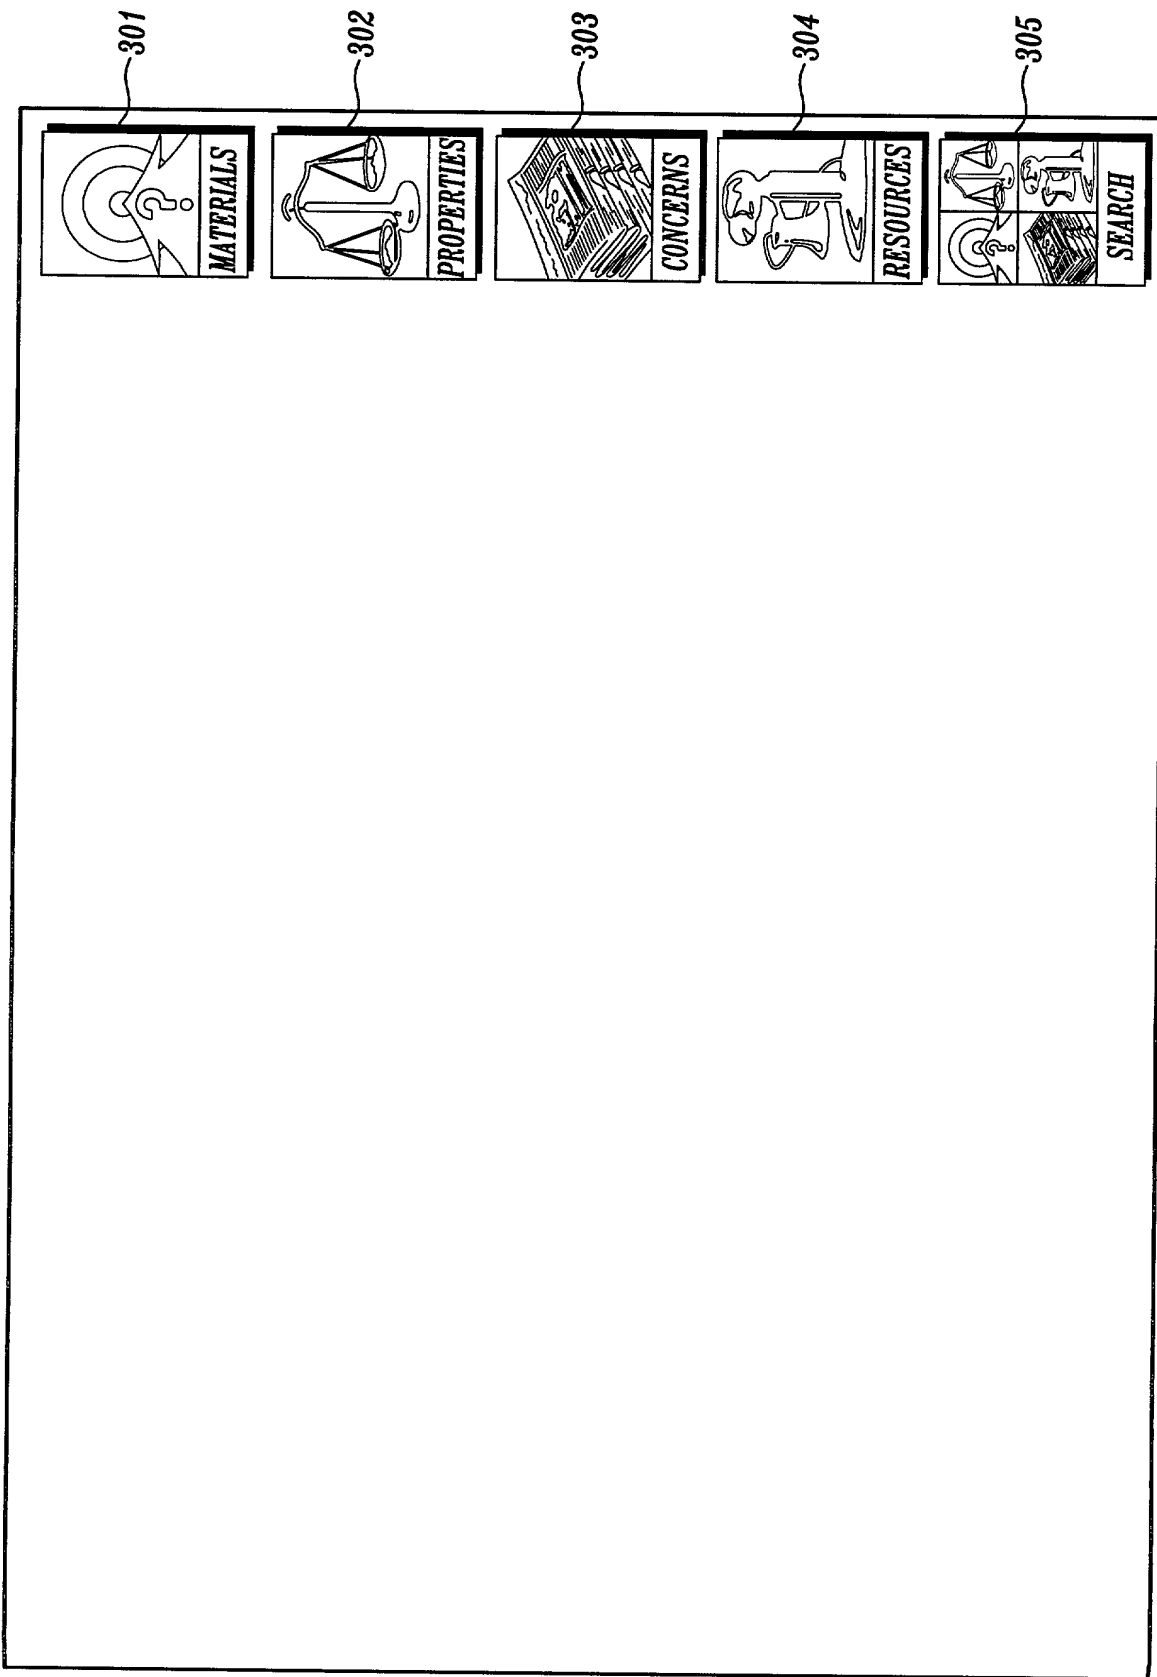


Fig. 6A.



*Fig. 6B.*





*Fig. 8.*

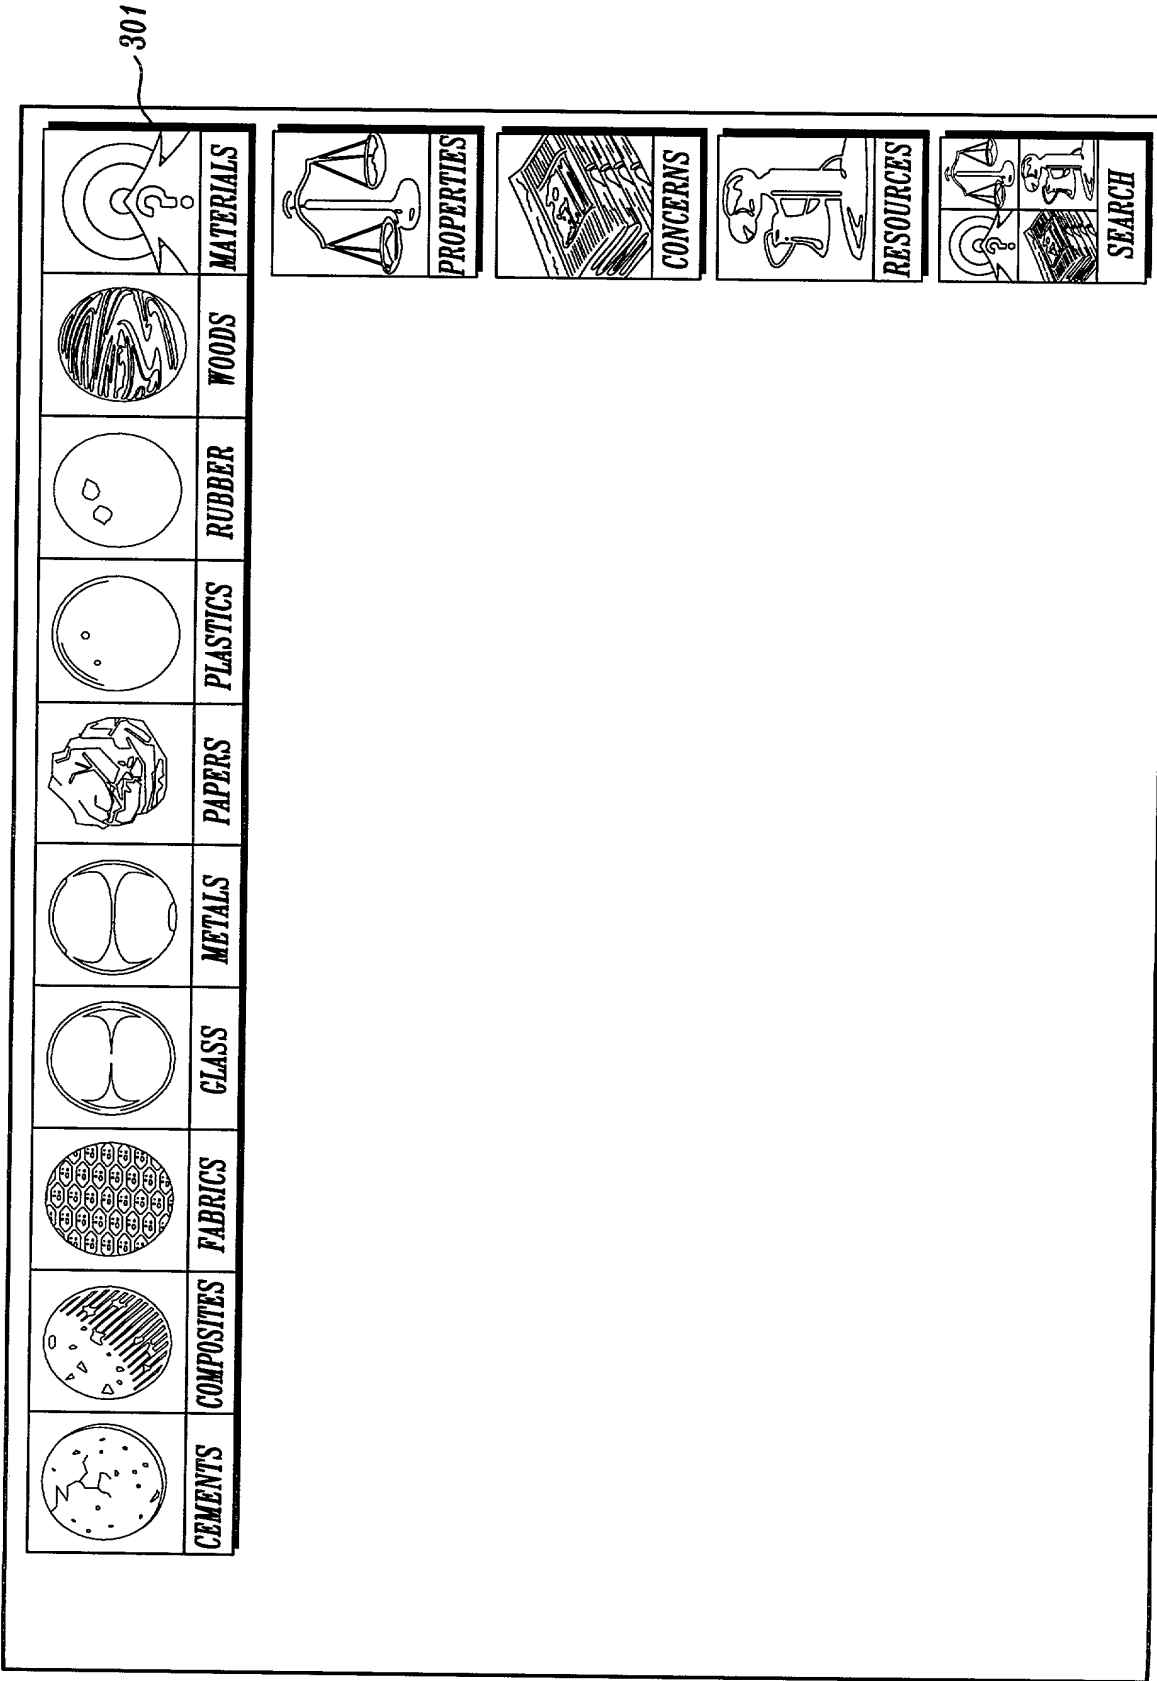


Fig. 9.

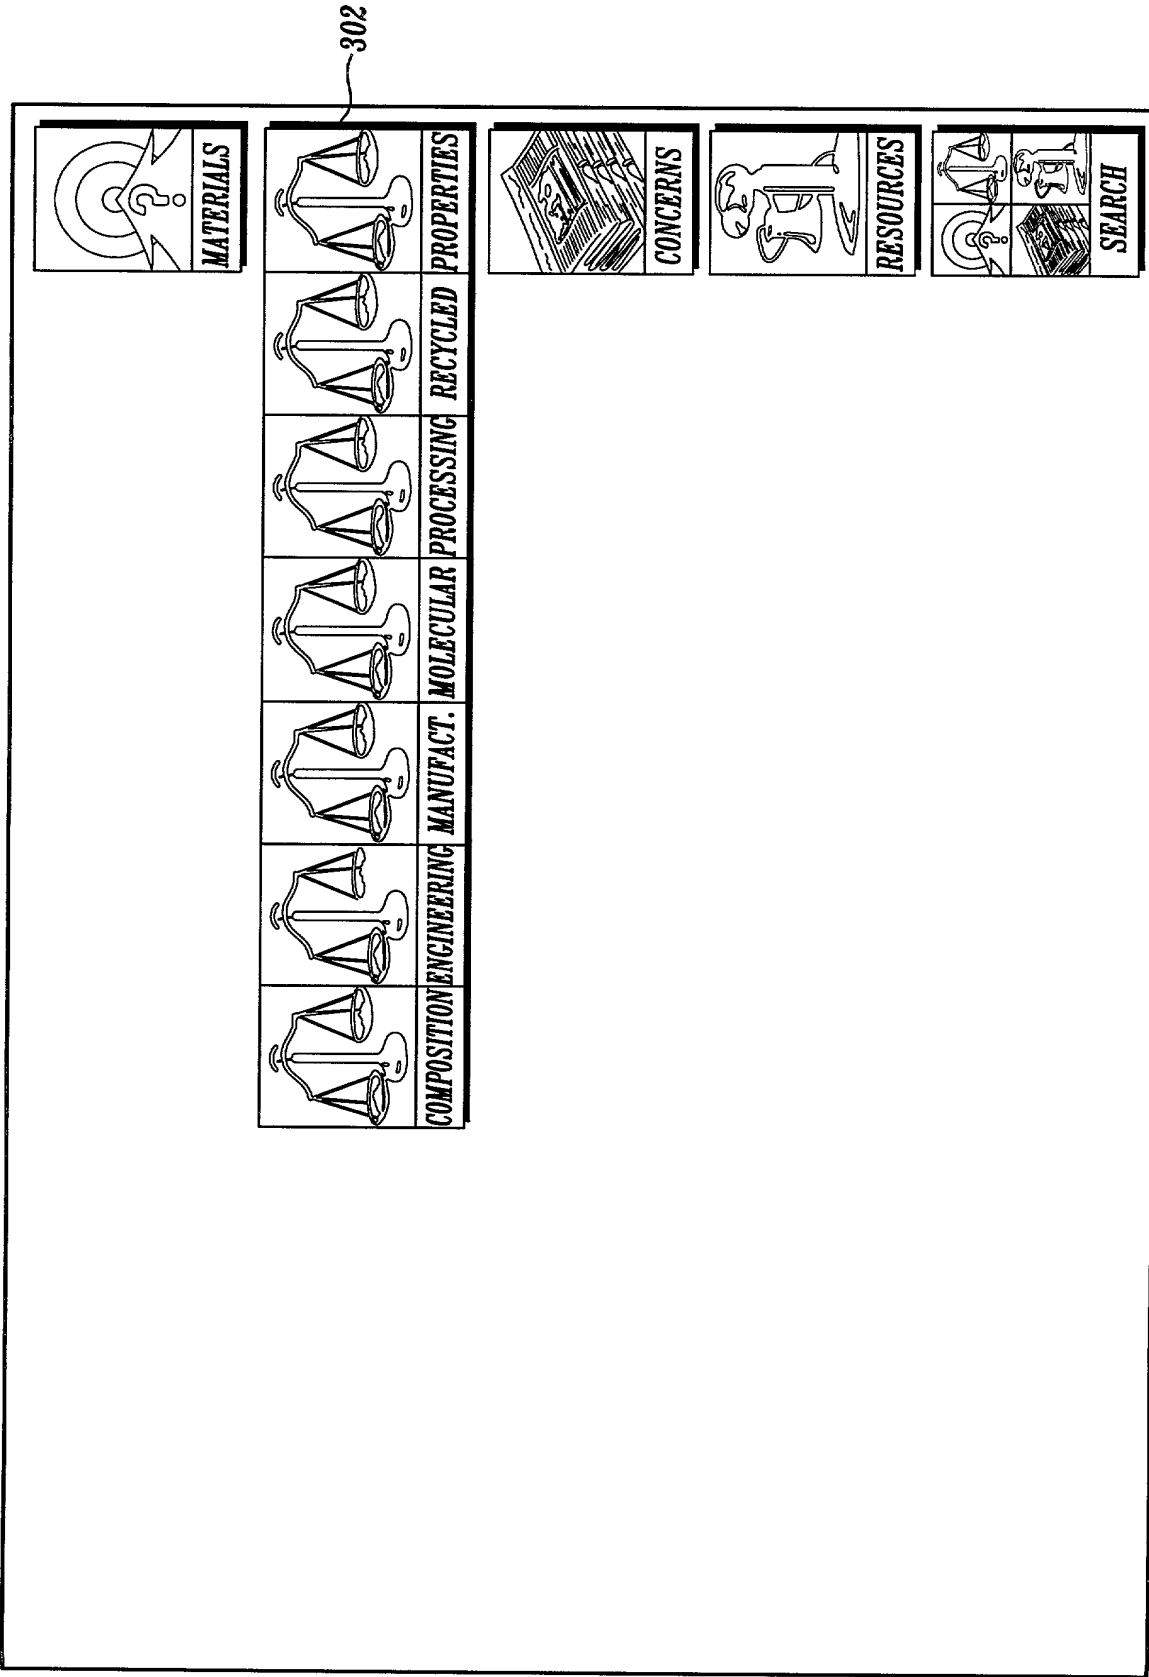


Fig. 10.

303

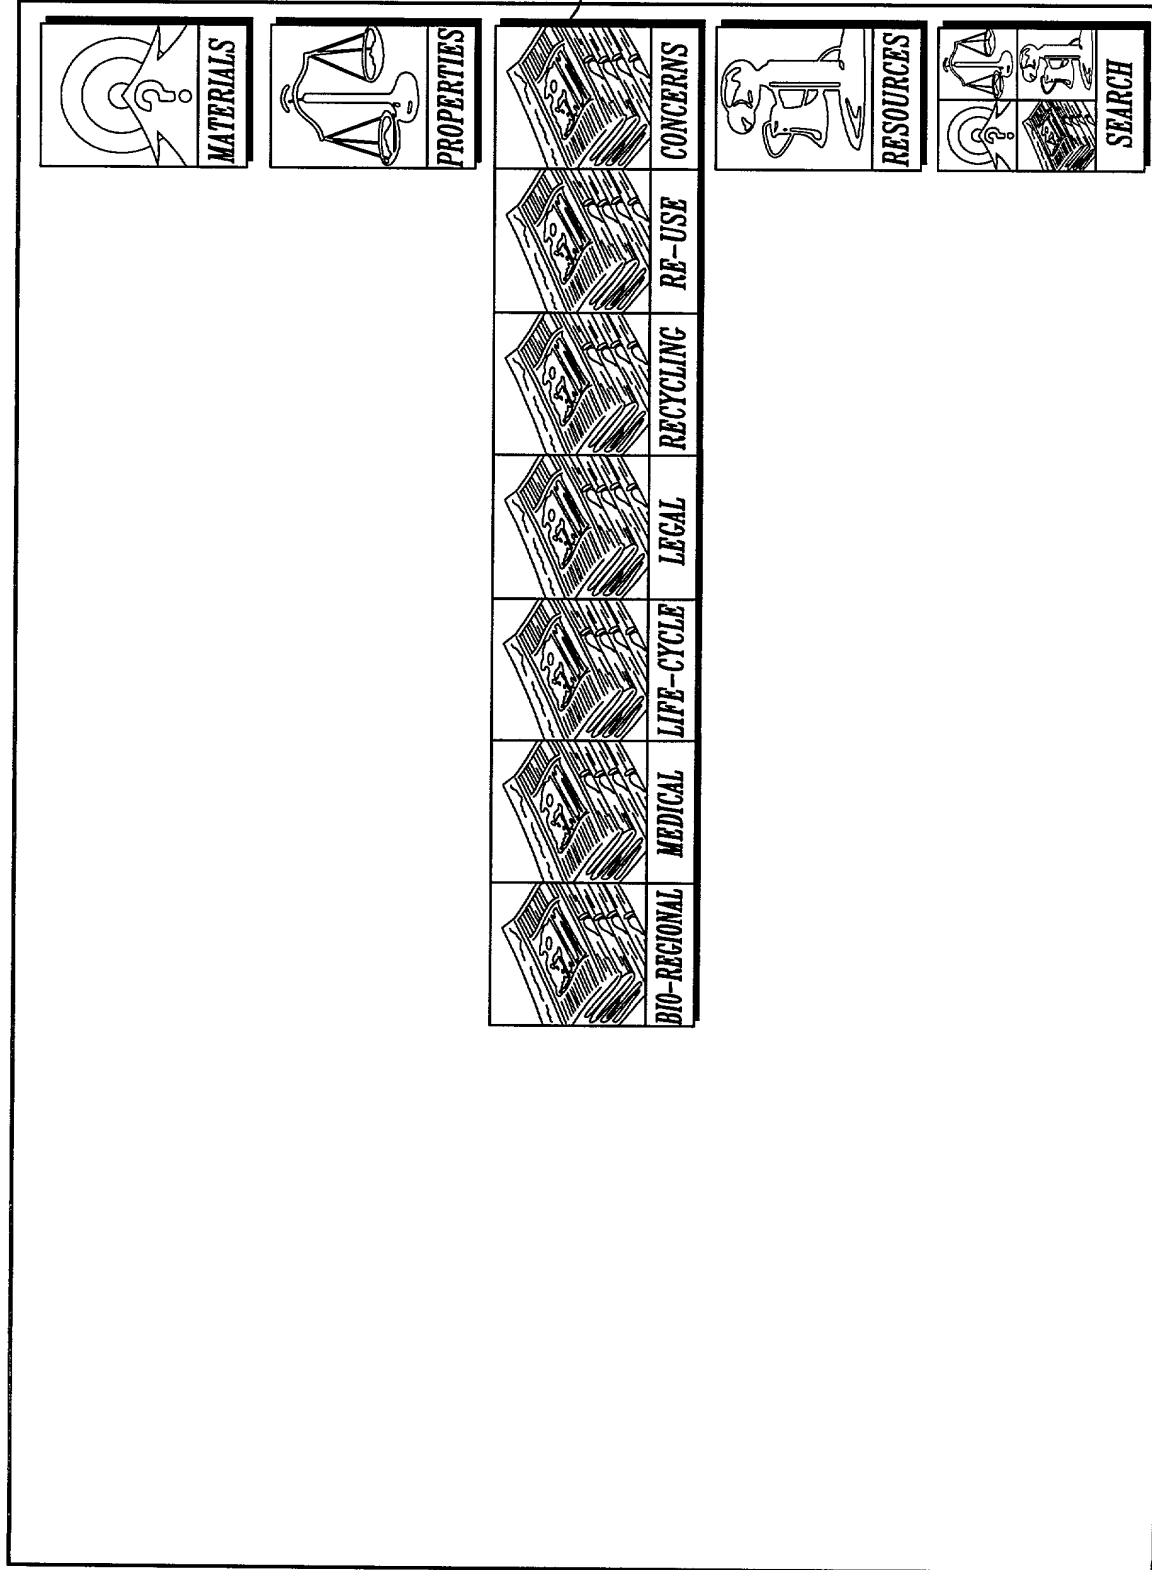


Fig. 11.

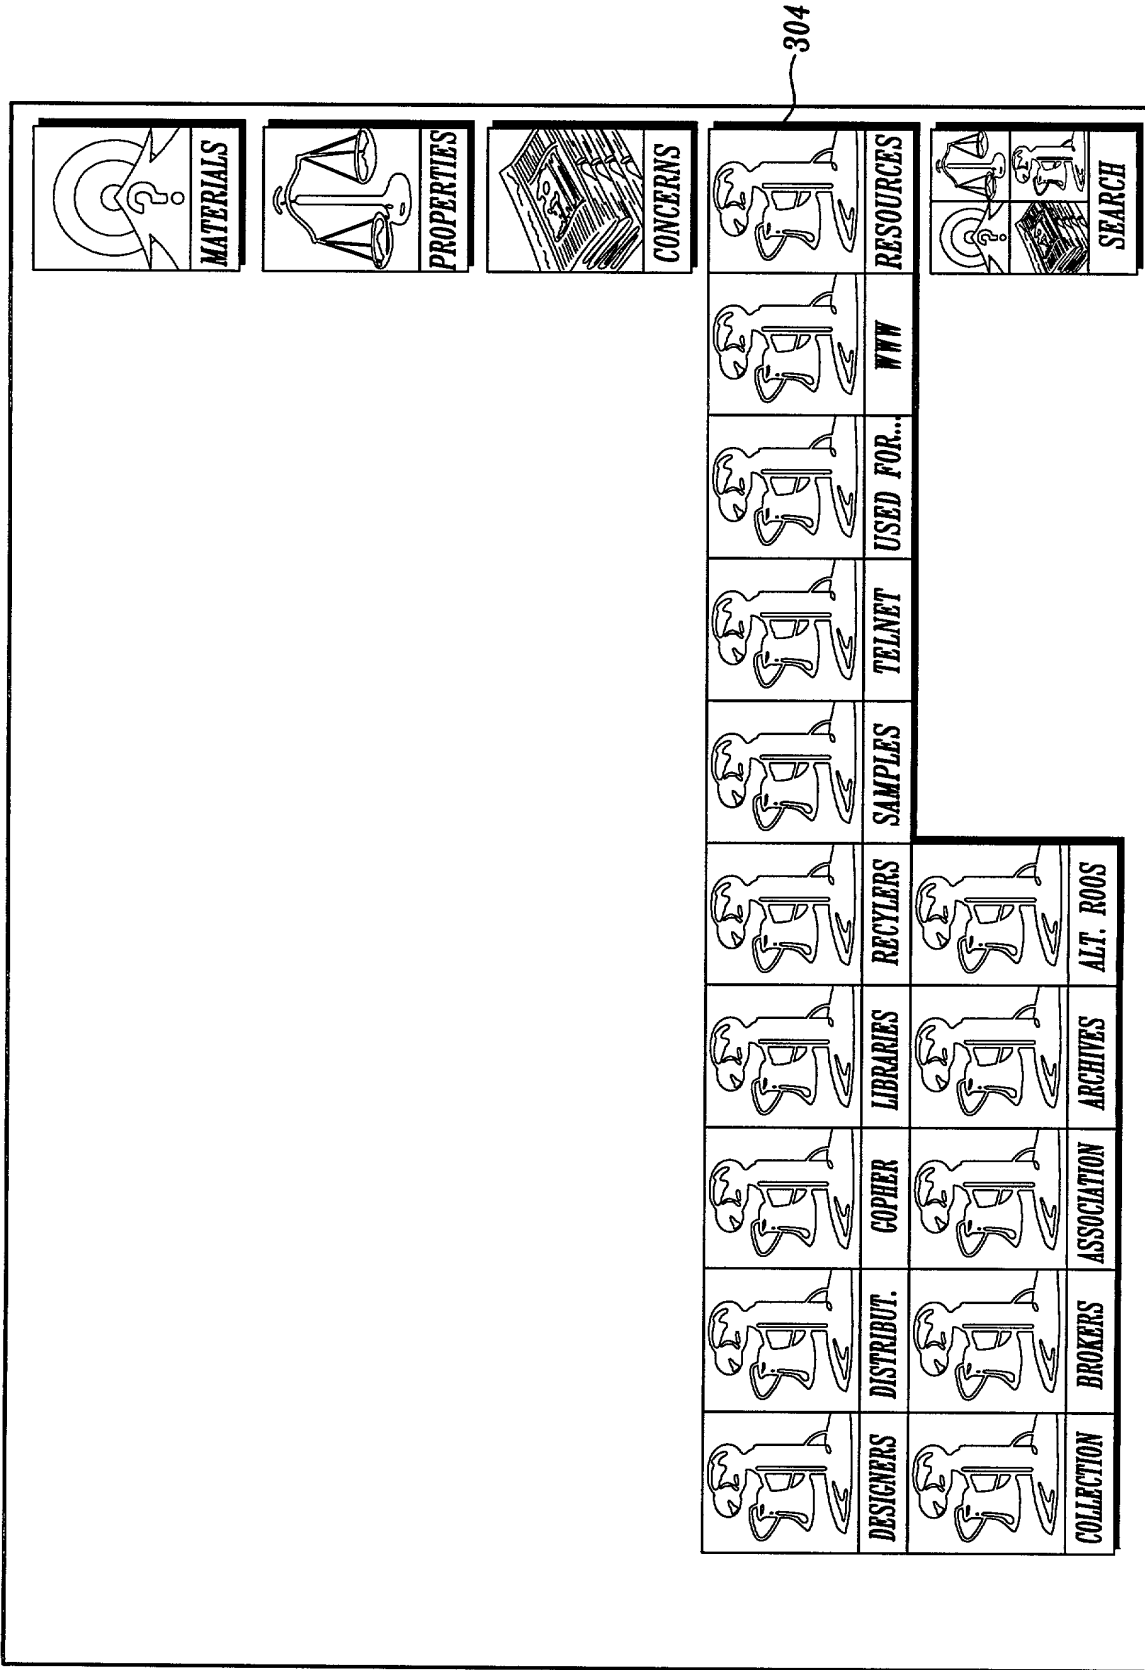


Fig. 12.

**COMBINED DECLARATION AND POWER OF ATTORNEY  
IN PATENT APPLICATION**

Attorney Docket No: KANG111537

As a below-named inventor, I hereby declare that:

my residence, post office address and citizenship are as stated below next to my name;

I believe that I am the original, first and sole inventor of the subject matter that is claimed and for which patent is sought on the invention entitled: ON-LINE DATABASE UPDATING NETWORK SYSTEM AND METHOD, the specification of which is attached hereto, and amended by preliminary amendment dated November 12, 1997, and attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below, any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed: NONE

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below: NONE

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) or PCT international application(s) designating the United States listed below, and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application:

<u>Serial No.</u>	<u>Filing Date</u>	<u>Status</u>
08/452,596	May 25, 1995	pending



Prior PCT Application:


<u>Number</u>	<u>Filing Date</u>	<u>Status</u>
PCT/US96/07488	20 May 1996	pending

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith: Bruce E. O'Connor, Reg. No. 24,849; Lee E. Johnson, Reg. No. 22,946; Gary S. Kindness, Reg. No. 22,178; James W. Anable, Reg. No. 26,827; James R. Uhlir, Reg. No. 25,096; Jerald E. Nagae, Reg. No. 29,418; Dennis K. Shelton, Reg. No. 26,997; Jeffrey M. Sakoi, Reg. No. 32,059; Ward Brown, Reg. No. 28,400; Robert J. Carlson, Reg. No. 35,472; Marcia S. Kelbon, Reg. No. 34,358; Paul L. Gardner, Reg. No. 22,372; Shaukat A. Karjeker, Reg. No. 34,049; and the firm of Christensen O'Connor Johnson & Kindness<sup>PLLC</sup>. Address all telephone calls to Mary L. Čulić at telephone No. (206) 224-0714.

Address all correspondence to:

CHRISTENSEN O'CONNOR JOHNSON & KINDNESS<sup>PLLC</sup>  
1420 Fifth Avenue  
Suite 2800  
Seattle, WA 98101-2347

I hereby further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

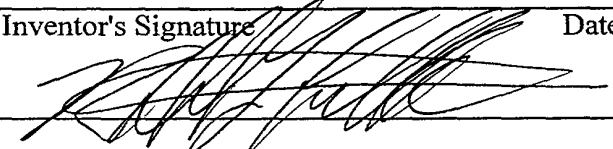Full Name of Inventor	Citizenship
R. David L. Campbell	U.S.A.
Residence	
3205 South Judkins, Seattle, WA 98144	
Post Office Address	
Same as above.	
Inventor's Signature	Date
	11/12/97

MLC:sbk